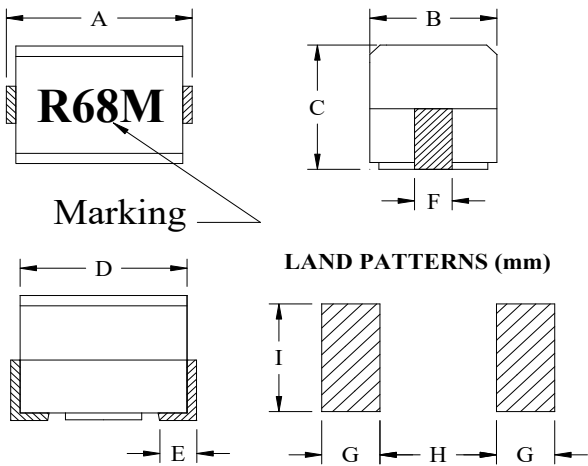


SPECIFICATION FOR APPROVAL

COMMODITY	WOUND CHIP INDUCTOR	SPEC NO.	SP-0230414017
ITEM	JWI 453232-R68M Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)			DIM.	TOL.
 Marking LAND PATTERNS (mm)		A	4.5	±0.3
		B	3.2	±0.2
		C	3.2	±0.2
		D	4.2	±0.2
		E	1.0	REF.
		F	1.2	REF.
		G	1.5	REF.
		H	2.2	REF.
		I	1.6	REF.

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	0.68 ± 20% μ H	☒ AGILENT 4294A Precision Impedance Analyzer ☒ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter ☐ ADEX AX-1155B DC Low Ohm Meter ☐ WAYNE KERR HI-POT TESTER 7600
Q	40 (min)	
TEST FREQUENCY	25.2 MHz	
TEST VOLT	0.25 V	
SRF	135 (min) MHz	
RDC	0.40 (max) Ω	
IDC	500 (max) mA	

REMARK :

. Operating Temperature : -40~+85℃.

PURCHASER CONFIRMED :

APPROVED CHECKED DRAWN

楊
偉鏗

姜
秀琴

陳
秀月