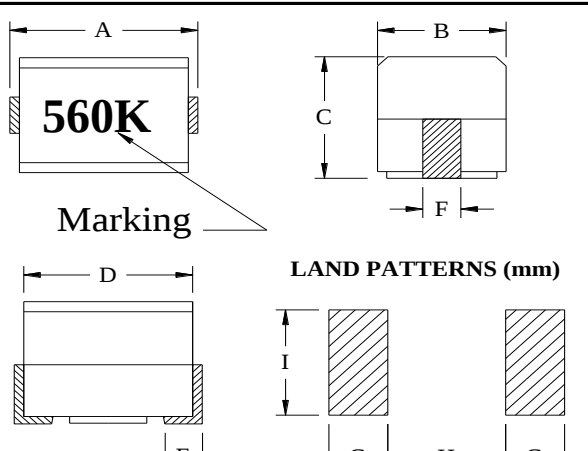


SPECIFICATION FOR APPROVAL

COMMODITY	WOUND CHIP INDUCTOR	SPEC NO.	SP-060918004
ITEM	JWI 453232-560K Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
 Marking LAND PATTERNS (mm)	A	4.5	±0.3
	B	3.2	±0.2
	C	3.2	±0.2
	D	4.2	±0.2
	E	1.0	REF.
	F	1.2	REF.
	G	1.5	REF.
	H	2.2	REF.
	I	1.6	REF.

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	56 ± 10% μ H	☒ AGILENT 4294A Precision Impedance Analyzer
Q	50 (min)	☒ Agilent 4287A RF LCR Meter
TEST FREQUENCY	2.52 MHz	☐ AGILENT 4285A Precision L.C.R.
TEST VOLT	0.25 V	☐ HP-4286A RF L.C.R. Meter.
SRF	9 (min) MHz	☒ CHROMA 3302 Automatic Components Analyzer.
RDC	5.5 (max) Ω	☐ WAYNE KERR 6420 Precision Impedance Analyzer.
IDC	135 (max) mA	☒ ZENTECH 1320 BIAS CURRENT.
		☒ BK PRECISION 2840 DC Resistance Meter
		☐ ZENTECH 502AC Resistance Merter
		☐ ADEX AX-1155B DC Low Ohm Meter
		☐ WAYNE KERR HI-POT TESTER 7600

REMARK :

. Operating Temperature : -40~+85°C.

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260

E-mail : jantek@jantek-elec.com.tw

Web-Site : www.jantek-elec.com.tw