


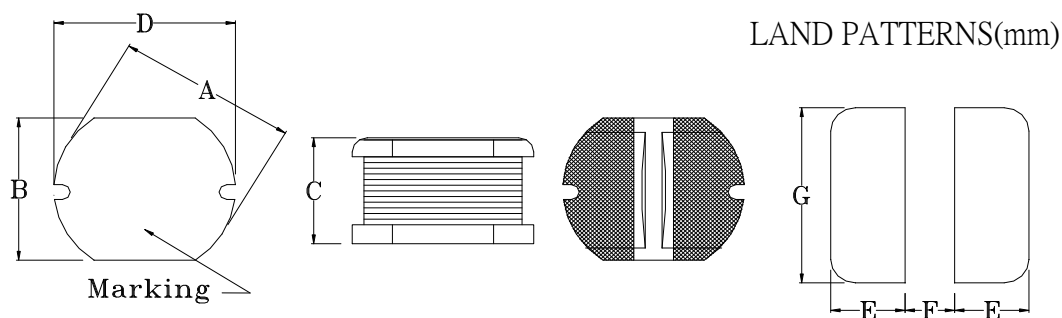

DIMENSIONS (mm)

Part No.	A	B	C	D	E	F	G
JTP 1004	10 ± 0.3	9.0 ± 0.3	4.0 ± 0.5	10.3 Max.	3.75	2.50	9.50

SERIES LIST

No.	Part No.	L (μH)	Test Frequency	RDC Max. (Ω)	IDC Max. (A)
1	JTP 1004-100K - ☐	10	2.52MHZ	0.053	2.38
2	JTP 1004-120K - ☐	12	2.52MHZ	0.061	2.13
3	JTP 1004-150K - ☐	15	2.52MHZ	0.070	1.87
4	JTP 1004-180K - ☐	18	2.52MHZ	0.081	1.73
5	JTP 1004-220K - ☐	22	2.52MHZ	0.088	1.60
6	JTP 1004-270K - ☐	27	2.52MHZ	0.100	1.44
7	JTP 1004-330K - ☐	33	2.52MHZ	0.120	1.26
8	JTP 1004-390K - ☐	39	2.52MHZ	0.151	1.20
9	JTP 1004-470K - ☐	47	2.52MHZ	0.170	1.10
10	JTP 1004-560K - ☐	56	2.52MHZ	0.199	1.01
11	JTP 1004-680K - ☐	68	2.52MHZ	0.223	0.91
12	JTP 1004-820K - ☐	82	2.52MHZ	0.252	0.85
13	JTP 1004-101K - ☐	100	1KHZ	0.344	0.74
14	JTP 1004-121K - ☐	120	1KHZ	0.396	0.69
15	JTP 1004-151K - ☐	150	1KHZ	0.544	0.61
16	JTP 1004-181K - ☐	180	1KHZ	0.621	0.56
17	JTP 1004-221K - ☐	220	1KHZ	0.721	0.53
18	JTP 1004-271K - ☐	270	1KHZ	0.949	0.45
19	JTP 1004-331K - ☐	330	1KHZ	1.100	0.42
20	JTP 1004-391K - ☐	390	1KHZ	1.245	0.38
21	JTP 1004-471K - ☐	470	1KHZ	1.526	0.35
22	JTP 1004-561K - ☐	560	1KHZ	1.904	0.32

Tolerance : K = ± 10% , K tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JTP 1004
Q'TY/Reel	500