


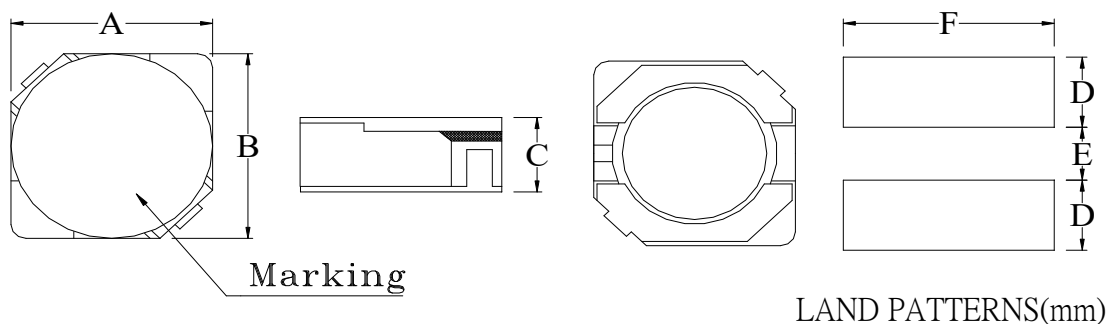

DIMENSIONS (mm)

Part No.	A	B	C	D	E	F
JPRD 0315	3.8 ± 0.3	3.8 ± 0.3	1.8 Max.	1.60	1.20	4.50

SERIES LIST

No.	Part No.	L (μH)	Test Frequency (KHz)	RDC Max. (Ω)	IDC Max. (A)
1	JPRD 0315-3R3M - ☐	3.3	100	0.085	1.10
2	JPRD 0315-3R9M - ☐	3.9	100	0.081	0.75
3	JPRD 0315-4R7M - ☐	4.7	100	0.105	0.90
4	JPRD 0315-5R6M - ☐	5.6	100	0.102	0.62
5	JPRD 0315-6R8M - ☐	6.8	100	0.170	0.73
6	JPRD 0315-8R2M - ☐	8.2	100	0.190	0.51
7	JPRD 0315-100M - ☐	10	100	0.210	0.55
8	JPRD 0315-120M - ☐	12	100	0.240	0.42
9	JPRD 0315-150M - ☐	15	100	0.315	0.45
10	JPRD 0315-180M - ☐	18	100	0.327	0.34
11	JPRD 0315-220M - ☐	22	100	0.470	0.40
12	JPRD 0315-270M - ☐	27	100	0.570	0.28
13	JPRD 0315-330M - ☐	33	100	0.675	0.32
14	JPRD 0315-390M - ☐	39	100	0.900	0.30
15	JPRD 0315-470M - ☐	47	100	0.980	0.21

Tolerance : M = ± 20% , M tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JPRD 0315
Q'TY/Reel	2,000