


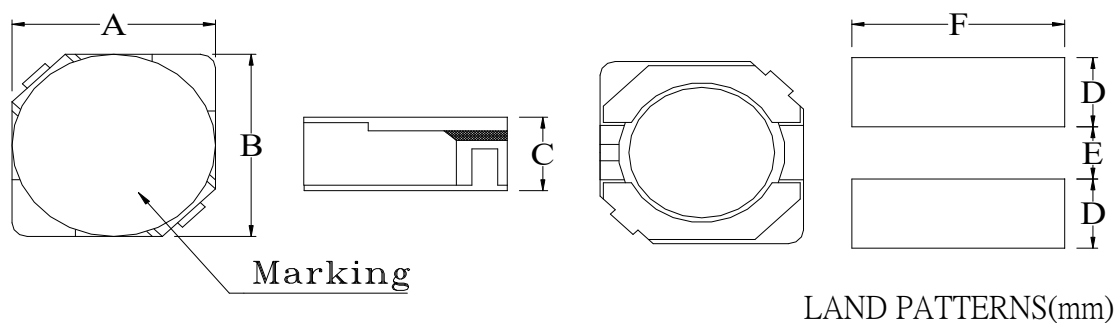

DIMENSIONS (mm)

Part No.	A	B	C	D	E	F
JPRD 0402	4.7 ± 0.3	4.7 ± 0.3	2.0 Max.	1.90	1.50	5.30

SERIES LIST

No.	Part No.	L (μH)	Test Frequency (KHz)	RDC Max. (Ω)	IDC Max. (A)
1	JPRD 0402-1R0M - ☐	1.0	100	0.045	1.72
2	JPRD 0402-2R2M - ☐	2.2	100	0.075	1.32
3	JPRD 0402-2R7M - ☐	2.7	100	0.105	1.28
4	JPRD 0402-3R3M - ☐	3.3	100	0.110	1.04
5	JPRD 0402-3R9M - ☐	3.9	100	0.155	0.88
6	JPRD 0402-4R7M - ☐	4.7	100	0.162	0.84
7	JPRD 0402-5R6M - ☐	5.6	100	0.170	0.80
8	JPRD 0402-6R8M - ☐	6.8	100	0.200	0.76
9	JPRD 0402-8R2M - ☐	8.2	100	0.245	0.68
10	JPRD 0402-100M - ☐	10	100	0.200	0.61
11	JPRD 0402-120M - ☐	12	100	0.210	0.56
12	JPRD 0402-150M - ☐	15	100	0.240	0.50
13	JPRD 0402-180M - ☐	18	100	0.338	0.48
14	JPRD 0402-220M - ☐	22	100	0.397	0.41
15	JPRD 0402-270M - ☐	27	100	0.441	0.35
16	JPRD 0402-330M - ☐	33	100	0.694	0.32
17	JPRD 0402-390M - ☐	39	100	0.709	0.30

Tolerance : M = ± 20% , M tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JPRD 0402
Q'TY/Reel	2,000