


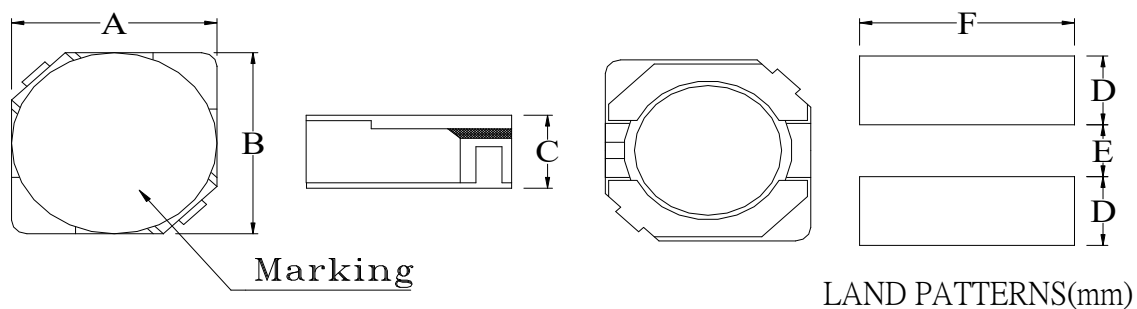

DIMENSIONS (mm)

Part No.	A	B	C	D	E	F
JPRD 0502	5.7 ± 0.3	5.7 ± 0.3	2.0 Max.	2.15	2.00	6.30

SERIES LIST

No.	Part No.	L (μ H)	Test Frequency (KHz)	RDC Max. (Ω)	IDC Max. (A)
1	JPRD 0502-R39N - ☐	0.39	10	0.0226	4.80
2	JPRD 0502-1R0N - ☐	1.00	10	0.0280	3.86
3	JPRD 0502-1R5N - ☐	1.50	10	0.0366	3.00
4	JPRD 0502-2R2N - ☐	2.20	10	0.0430	2.63
5	JPRD 0502-3R3N - ☐	3.30	10	0.0516	2.00
6	JPRD 0502-4R1M - ☐	4.10	10	0.0630	1.95
7	JPRD 0502-4R3M - ☐	4.30	10	0.0758	1.65
8	JPRD 0502-4R7M - ☐	4.70	10	0.0785	1.95
9	JPRD 0502-8R2M - ☐	8.20	10	0.1353	1.25
10	JPRD 0502-100M - ☐	10.0	10	0.1353	1.09
11	JPRD 0502-220M - ☐	22.0	10	0.3000	0.80
12	JPRD 0502-330M - ☐	33.0	10	0.3860	0.65
13	JPRD 0502-470M - ☐	47.0	10	0.5500	0.45
14	JPRD 0502-221M- ☐	220	10	3.0000	0.30

Tolerance : M = $\pm 20\%$, N = $\pm 30\%$

☐ : Revision of specification

PACKAGE

Type	JPRD 0502
Q'TY/Reel	2,000