


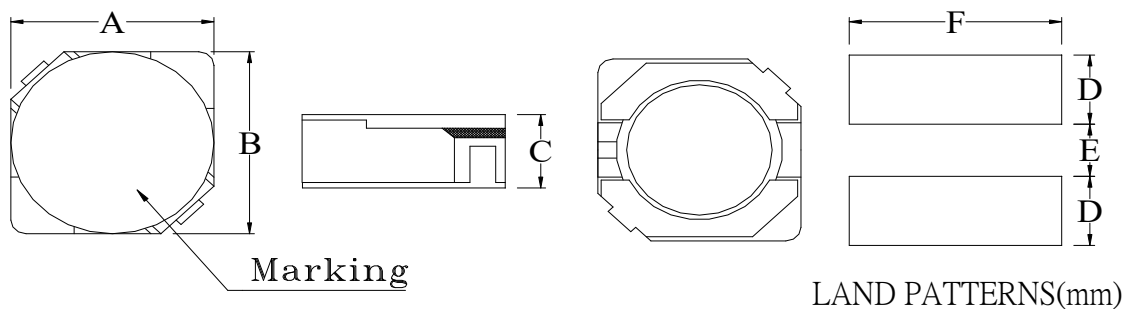

DIMENSIONS (mm)

Part No.	A	B	C	D	E	F
JPRD 0403	4.7 ± 0.3	4.7 ± 0.3	3.0 Max.	1.90	1.50	5.30

SERIES LIST

No.	Part No.	L (μH)	Test Frequency (KHz)	RDC Max. (Ω)	IDC Max. (A)
1	JPRD 0403-1R2M - □	1.2	100	0.0270	2.56
2	JPRD 0403-1R8M - □	1.8	100	0.0275	2.20
3	JPRD 0403-2R2M - □	2.2	100	0.0313	2.04
4	JPRD 0403-2R7M - □	2.7	100	0.0433	1.60
5	JPRD 0403-3R3M - □	3.3	100	0.0490	1.57
6	JPRD 0403-3R9M - □	3.9	100	0.0648	1.44
7	JPRD 0403-4R7M - □	4.7	100	0.0720	1.32
8	JPRD 0403-5R6M - □	5.6	100	0.1009	1.17
9	JPRD 0403-6R8M - □	6.8	100	0.1089	1.12
10	JPRD 0403-8R2M - □	8.2	100	0.1175	1.04
11	JPRD 0403-100M - □	10	100	0.1238	1.00
12	JPRD 0403-120M - □	12	100	0.1316	0.84
13	JPRD 0403-150M - □	15	100	0.1490	0.76
14	JPRD 0403-180M - □	18	100	0.1660	0.72
15	JPRD 0403-220M - □	22	100	0.2350	0.70
16	JPRD 0403-270M - □	27	100	0.2610	0.58
17	JPRD 0403-330M - □	33	100	0.3780	0.56
18	JPRD 0403-390M - □	39	100	0.3837	0.50
19	JPRD 0403-470M - □	47	100	0.5870	0.48
20	JPRD 0403-560M - □	56	100	0.6245	0.41
21	JPRD 0403-680M - □	68	100	0.6990	0.35
22	JPRD 0403-820M - □	82	100	0.9148	0.32
23	JPRD 0403-101M - □	100	100	1.0200	0.29
24	JPRD 0403-121M - □	120	100	1.2700	0.27
25	JPRD 0403-151M - □	150	100	1.3500	0.24
26	JPRD 0403-181M - □	180	100	1.5400	0.22

Tolerance : M = ± 20% , M tolerance is standard.

□ : Revision of specification

PACKAGE

Type	JPRD 0403
Q'TY/Reel	2,000