


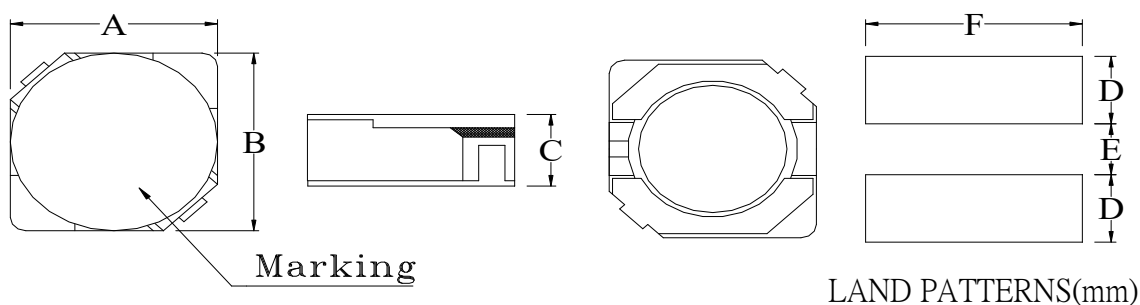

DIMENSIONS (mm)

Part No.	A	B	C	D	E	F
JPRD 0503	5.7 ± 0.3	5.7 ± 0.3	3.0 Max.	2.15	2.00	6.30

SERIES LIST

No.	Part No.	L (μ H)	Test Frequency (KHz)	RDC Max. (Ω)	IDC Max. (A)
1	JPRD 0503-2R5M - ☐	2.5	10	0.018	2.60
2	JPRD 0503-3R0M - ☐	3.0	10	0.024	2.40
3	JPRD 0503-4R2M - ☐	4.2	10	0.031	2.20
4	JPRD 0503-5R3M - ☐	5.3	10	0.038	1.90
5	JPRD 0503-6R2M - ☐	6.2	10	0.045	1.80
6	JPRD 0503-8R2M - ☐	8.2	10	0.053	1.60
7	JPRD 0503-100M - ☐	10	10	0.065	1.30
8	JPRD 0503-120M - ☐	12	10	0.076	1.20
9	JPRD 0503-150M - ☐	15	10	0.103	1.10
10	JPRD 0503-180M - ☐	18	10	0.110	1.00
11	JPRD 0503-220M - ☐	22	10	0.122	0.90
12	JPRD 0503-270M - ☐	27	10	0.175	0.85
13	JPRD 0503-330M - ☐	33	10	0.189	0.75
14	JPRD 0503-390M - ☐	39	10	0.212	0.70
15	JPRD 0503-470M - ☐	47	10	0.260	0.62
16	JPRD 0503-560M - ☐	56	10	0.305	0.58
17	JPRD 0503-680M - ☐	68	10	0.355	0.52
18	JPRD 0503-820M - ☐	82	10	0.463	0.46
19	JPRD 0503-101M - ☐	100	10	0.520	0.42

Tolerance : M = $\pm 20\%$, M tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JPRD 0503
Q'TY/Reel	2,000