


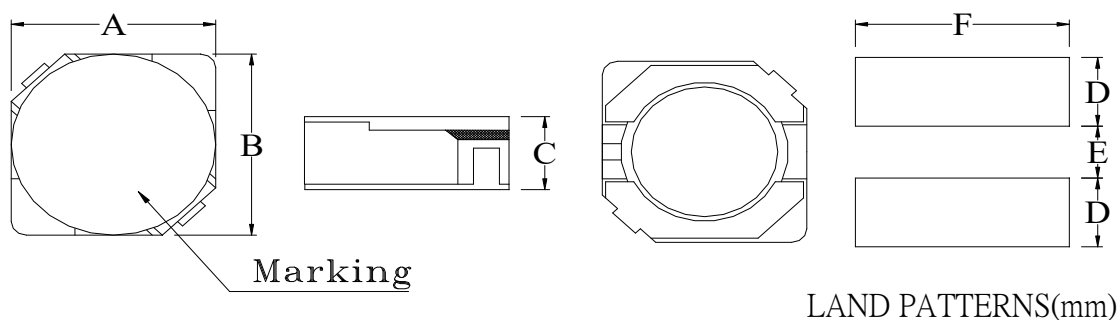

DIMENSIONS (mm)

Part No.	A	B	C	D	E	F
JPRD 0603	6.7 ± 0.3	6.7 ± 0.3	3.0 Max.	2.65	2.00	7.30

SERIES LIST

No.	Part No.	L (μH)	Test Frequency (KHz)	RDC Max. (Ω)	IDC Max. (A)
1	JPRD 0603-3R0M - ☐	3.0	10	0.024	3.00
2	JPRD 0603-3R9M - ☐	3.9	10	0.027	2.60
3	JPRD 0603-5R0M - ☐	5.0	10	0.031	2.40
4	JPRD 0603-6R0M - ☐	6.0	10	0.035	2.25
5	JPRD 0603-7R3M - ☐	7.3	10	0.054	2.10
6	JPRD 0603-8R6M - ☐	8.6	10	0.058	1.85
7	JPRD 0603-100M - ☐	10	10	0.065	1.70
8	JPRD 0603-120M - ☐	12	10	0.076	1.20
9	JPRD 0603-150M - ☐	15	10	0.084	1.40
10	JPRD 0603-180M - ☐	18	10	0.095	1.32
11	JPRD 0603-220M - ☐	22	10	0.128	1.20
12	JPRD 0603-270M - ☐	27	10	0.142	1.05
13	JPRD 0603-330M - ☐	33	10	0.165	0.97
14	JPRD 0603-390M - ☐	39	10	0.210	0.86
15	JPRD 0603-470M - ☐	47	10	0.238	0.80
16	JPRD 0603-560M - ☐	56	10	0.277	0.73
17	JPRD 0603-680M - ☐	68	10	0.304	0.65
18	JPRD 0603-820M - ☐	82	10	0.390	0.60
19	JPRD 0603-101M - ☐	100	10	0.535	0.54
20	JPRD 0603-121M - ☐	120	10	0.900	0.50

Tolerance : M = ± 20% , M tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JPRD 0603
Q'TY/Reel	1,000