


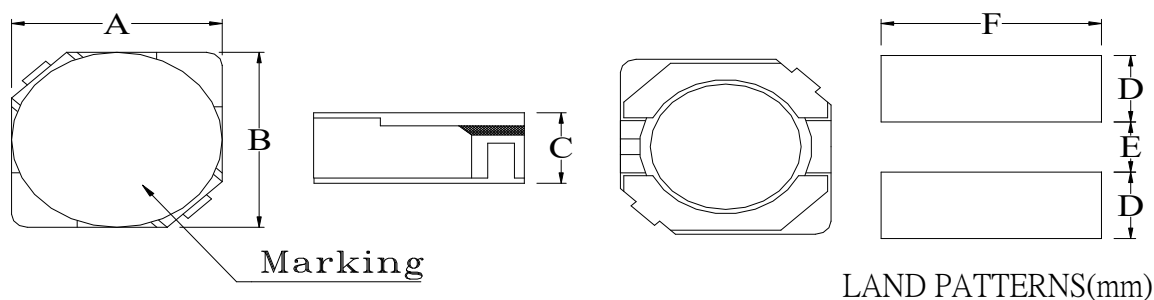

DIMENSIONS (mm)

Part No.	A	B	C	D	E	F
JPRD 0604	6.7 ± 0.3	6.7 ± 0.3	4.0 Max.	2.65	2.00	7.30

SERIES LIST

No.	Part No.	L (μH)	Test Frequency (KHz)	RDC Max. (Ω)	IDC Max. (A)
1	JPRD 0604-3R3M - ☐	3.3	10	0.020	3.50
2	JPRD 0604-5R0M - ☐	5.0	10	0.032	2.90
3	JPRD 0604-6R2M - ☐	6.2	10	0.027	2.50
4	JPRD 0604-7R4M - ☐	7.4	10	0.031	2.30
5	JPRD 0604-8R7M - ☐	8.7	10	0.034	2.20
6	JPRD 0604-100M - ☐	10	10	0.038	2.00
7	JPRD 0604-120M - ☐	12	10	0.053	1.70
8	JPRD 0604-150M - ☐	15	10	0.057	1.60
9	JPRD 0604-180M - ☐	18	10	0.092	1.50
10	JPRD 0604-220M - ☐	22	10	0.096	1.30
11	JPRD 0604-270M - ☐	27	10	0.109	1.20
12	JPRD 0604-330M - ☐	33	10	0.124	1.10
13	JPRD 0604-390M - ☐	39	10	0.138	1.00
14	JPRD 0604-470M - ☐	47	10	0.155	0.95
15	JPRD 0604-560M - ☐	56	10	0.202	0.85
16	JPRD 0604-680M - ☐	68	10	0.234	0.75
17	JPRD 0604-820M - ☐	82	10	0.324	0.70
18	JPRD 0604-101M - ☐	100	10	0.358	0.65

Tolerance : M = ± 20% , M tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JPRD 0604
Q'TY/Reel	1,000