


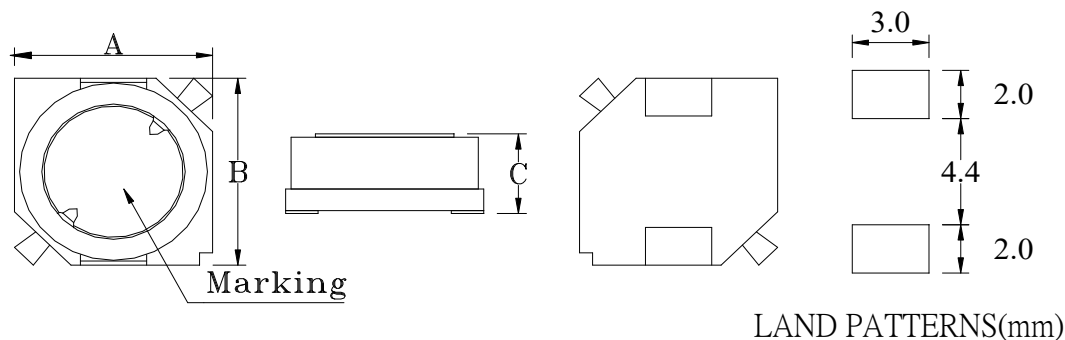

DIMENSIONS (mm)

Part No.	A	B	C
JSB 0703	7.6 Max.	7.6 Max.	3.5 Max.

SERIES LIST

No.	Part No.	L (μ H)	RDC (Ω) (max)	IDC (A) (max)
1	JSB 0703-1R0M - ☐	1.0	0.019	3.12
2	JSB 0703-1R5M - ☐	1.5	0.023	2.85
3	JSB 0703-2R2M - ☐	2.2	0.028	2.66
4	JSB 0703-3R3M - ☐	3.3	0.035	2.26
5	JSB 0703-4R7M - ☐	4.7	0.043	1.96
6	JSB 0703-6R8M - ☐	6.8	0.055	1.76
7	JSB 0703-100M - ☐	10	0.080	1.34
8	JSB 0703-120M - ☐	12	0.090	1.23
9	JSB 0703-150M - ☐	15	0.120	1.09
10	JSB 0703-180M - ☐	18	0.130	0.99
11	JSB 0703-220M - ☐	22	0.150	0.90
12	JSB 0703-270M - ☐	27	0.210	0.81
13	JSB 0703-330M - ☐	33	0.250	0.72
14	JSB 0703-390M - ☐	39	0.310	0.67
15	JSB 0703-470M - ☐	47	0.350	0.60
16	JSB 0703-560M - ☐	56	0.430	0.55
17	JSB 0703-680M - ☐	68	0.520	0.50
18	JSB 0703-820M - ☐	82	0.600	0.46
19	JSB 0703-101M - ☐	100	0.790	0.41
20	JSB 0703-221M - ☐	220	1.250	0.25
21	JSB 0703-271M - ☐	270	1.480	0.25
22	JSB 0703-471M - ☐	470	2.410	0.17

Test frequency is 100KHz.

DCR & IDC listed are all Max. value.

Tolerance : M $\pm$ 20% , M tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JSB 0703
Q'TY/Reel	1,000