


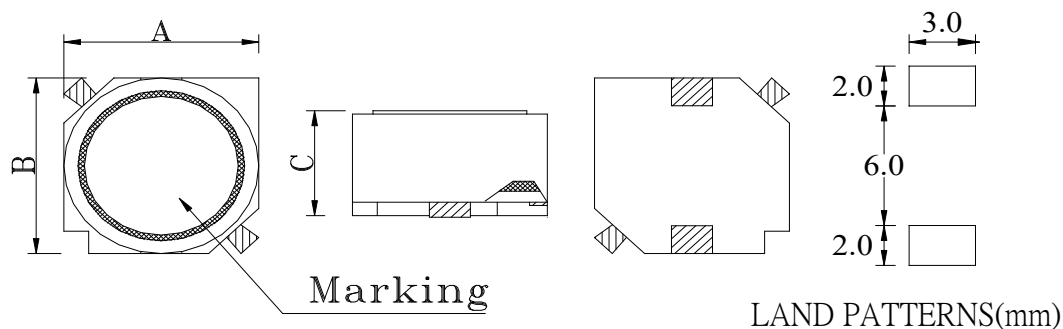

DIMENSIONS (mm)

Part No.	A	B	C
JSB 1003	10.5 Max.	10.5 Max.	3.5 Max.

SERIES LIST

No.	Part No.	L (μ H)	RDC (Ω) (max)	IDC (A) (max)
1	JSB 1003-2R2M - ☐	2.2	0.0162	5.00
2	JSB 1003-4R7M - ☐	4.7	0.0343	3.20
3	JSB 1003-7R0M - ☐	7.0	0.0423	2.30
4	JSB 1003-100M - ☐	10	0.0585	2.10
5	JSB 1003-150M - ☐	15	0.0800	1.60
6	JSB 1003-220M - ☐	22	0.1094	1.30
7	JSB 1003-270M - ☐	27	0.1718	1.20
8	JSB 1003-330M - ☐	33	0.1770	1.10
9	JSB 1003-470M - ☐	47	0.2340	1.00
10	JSB 1003-680M - ☐	68	0.3240	0.90
11	JSB 1003-101M - ☐	100	0.5190	0.72
12	JSB 1003-151M - ☐	150	0.7775	0.65
13	JSB 1003-171M - ☐	170	0.9140	0.60
14	JSB 1003-181M - ☐	180	1.0800	0.60
15	JSB 1003-221M - ☐	220	1.2150	0.46
16	JSB 1003-271M - ☐	270	1.7100	0.40
17	JSB 1003-331M - ☐	330	1.8200	0.32
18	JSB 1003-102M - ☐	1000	4.3500	0.30

Test frequency is 1KHz.

DCR & IDC listed are all Max. value.

Tolerance : M $\pm$ 20% , M tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JSB 1003
Q'TY/Reel	1,000