


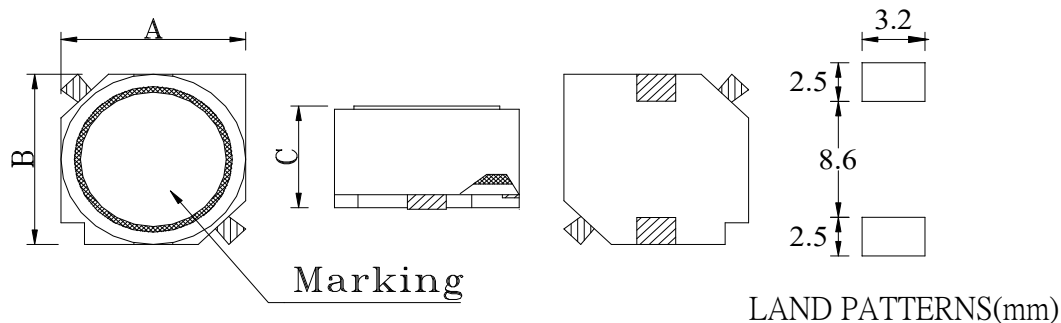

DIMENSIONS (mm)

Part No.	A	B	C
JSB 1206	12.5 ± 0.3	12.5 ± 0.3	5.5 ± 0.35

SERIES LIST

No.	Part No.	L (μ H)	RDC (Ω) (max)	IDC (A) (max)
1	JSB 1206-2R2M - ☐	2.2	0.0186	8.10
2	JSB 1206-3R3M - ☐	3.3	0.0197	8.00
3	JSB 1206-4R7M - ☐	4.7	0.0239	7.60
4	JSB 1206-5R6M - ☐	5.6	0.0272	6.20
5	JSB 1206-6R8M - ☐	6.8	0.0273	6.00
6	JSB 1206-8R2M - ☐	8.2	0.0344	5.20
7	JSB 1206-100M - ☐	10	0.0258	4.30
8	JSB 1206-150M - ☐	15	0.0311	3.90
9	JSB 1206-220M - ☐	22	0.0406	3.40
10	JSB 1206-330M - ☐	33	0.0498	3.10
11	JSB 1206-470M - ☐	47	0.0742	2.50
12	JSB 1206-680M - ☐	68	0.1275	2.20
13	JSB 1206-101M - ☐	100	0.1404	1.80
14	JSB 1206-151M - ☐	150	0.2280	1.40
15	JSB 1206-171M - ☐	170	0.3160	1.30
16	JSB 1206-221M - ☐	220	0.3240	1.20
17	JSB 1206-331M - ☐	330	0.4920	1.00
18	JSB 1206-681M - ☐	680	0.9120	0.73
19	JSB 1206-102M - ☐	1000	1.3440	0.60
20	JSB 1206-152M - ☐	1500	2.0760	0.48

Test frequency is 1KHz.

DCR & IDC listed are all Max. value.

Tolerance : M $\pm$ 20% , M tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JSB 1206
Q'TY/Reel	500