


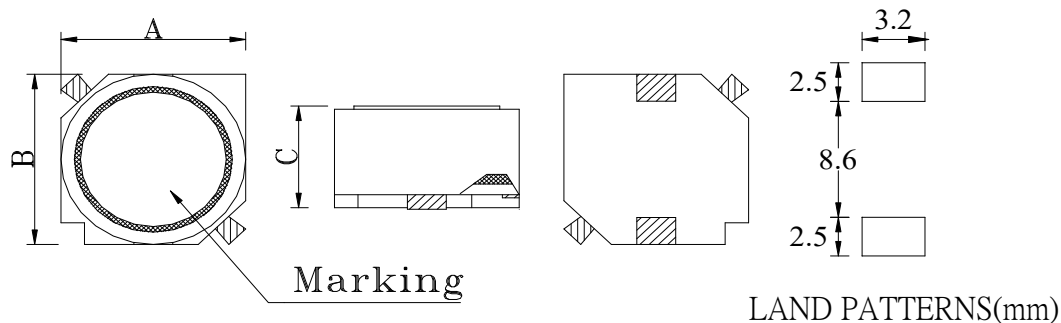

DIMENSIONS (mm)

Part No.	A	B	C
JSB 1207	12.5 ± 0.3	12.5 ± 0.3	6.5 ± 0.35

SERIES LIST

No.	Part No.	L (μ H)	RDC (Ω) (max)	IDC (A) (max)
1	JSB 1207-2R0M - ☐	2.0	0.0140	6.20
2	JSB 1207-2R7M - ☐	2.7	0.0199	6.00
3	JSB 1207-7R0M - ☐	7.0	0.0212	5.70
4	JSB 1207-100M - ☐	10.0	0.0312	5.40
5	JSB 1207-150M - ☐	15.0	0.0330	4.40
6	JSB 1207-220M - ☐	22.0	0.0559	3.80
7	JSB 1207-330M - ☐	33.0	0.0704	3.40
8	JSB 1207-470M - ☐	47.0	0.0693	2.80
9	JSB 1207-560M - ☐	56.0	0.1070	2.50
10	JSB 1207-680M - ☐	68.0	0.1168	2.40
11	JSB 1207-820M - ☐	82.0	0.1716	2.10
12	JSB 1207-101M - ☐	100	0.1480	1.90
13	JSB 1207-151M - ☐	150	0.2500	1.60
14	JSB 1207-171M - ☐	170	0.3130	1.40
15	JSB 1207-221M - ☐	220	0.3280	1.20
16	JSB 1207-471M - ☐	470	1.2360	1.00
17	JSB 1207-821M - ☐	820	3.5000	0.35

Test frequency is 1KHz.

DCR & IDC listed are all Max. value.

Tolerance : M $\pm$ 20% , M tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JSB 1207
Q'TY/Reel	500