


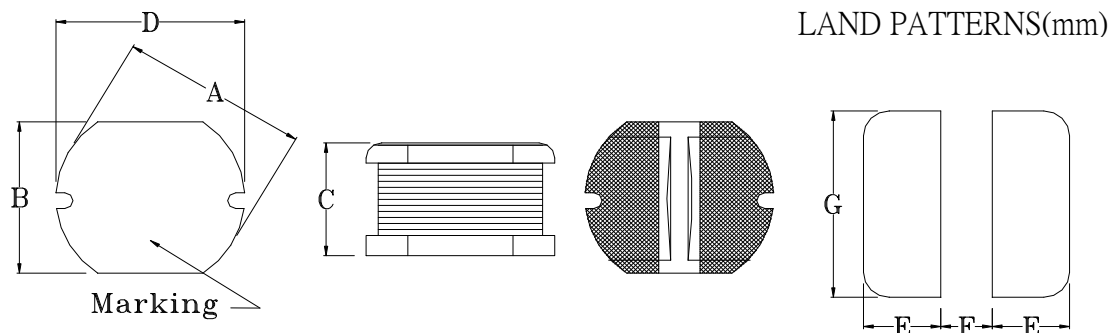

DIMENSIONS (mm)

Part No.	A	B	C	D	E	F	G
JTP 0403	4.5 ± 0.3	4.0 ± 0.3	3.2 ± 0.30	4.5 ± 0.3	1.80	1.50	4.50

SERIES LIST

No.	Part No.	L (μ H)	Test Frequency (MHz)	RDC Max. (Ω)	IDC Max. (A)
1	JTP 0403-1R0M - ☐	1.0	7.96	0.0487	2.56
2	JTP 0403-1R4M - ☐	1.4	7.96	0.0562	2.52
3	JTP 0403-1R8M - ☐	1.8	7.96	0.0637	1.95
4	JTP 0403-2R2M - ☐	2.2	7.96	0.0712	1.75
5	JTP 0403-2R7M - ☐	2.7	7.96	0.0787	1.58
6	JTP 0403-3R3M - ☐	3.3	7.96	0.0862	1.44
7	JTP 0403-3R9M - ☐	3.9	7.96	0.0937	1.33
8	JTP 0403-4R7M - ☐	4.7	7.96	0.1087	1.15
9	JTP 0403-5R6M - ☐	5.6	7.96	0.1257	0.99
10	JTP 0403-6R8M - ☐	6.8	7.96	0.1312	0.95
11	JTP 0403-8R2M - ☐	8.2	7.96	0.1462	0.84
12	JTP 0403-100K - ☐	10	2.52	0.1820	1.04
13	JTP 0403-120K - ☐	12	2.52	0.210	0.97
14	JTP 0403-150K - ☐	15	2.52	0.2350	0.85
15	JTP 0403-180K - ☐	18	2.52	0.3380	0.74
16	JTP 0403-220K - ☐	22	2.52	0.3780	0.68
17	JTP 0403-270K - ☐	27	2.52	0.5220	0.62
18	JTP 0403-330K - ☐	33	2.52	0.540	0.56
19	JTP 0403-390K - ☐	39	2.52	0.5870	0.52
20	JTP 0403-470K - ☐	47	2.52	0.8440	0.44
21	JTP 0403-560K - ☐	56	2.52	0.9370	0.42
22	JTP 0403-680K - ☐	68	2.52	1.1170	0.37

Tolerance : K = $\pm 10\%$; M = $\pm 20\%$, M tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JTP 0403
Q'TY/Reel	1,500

