


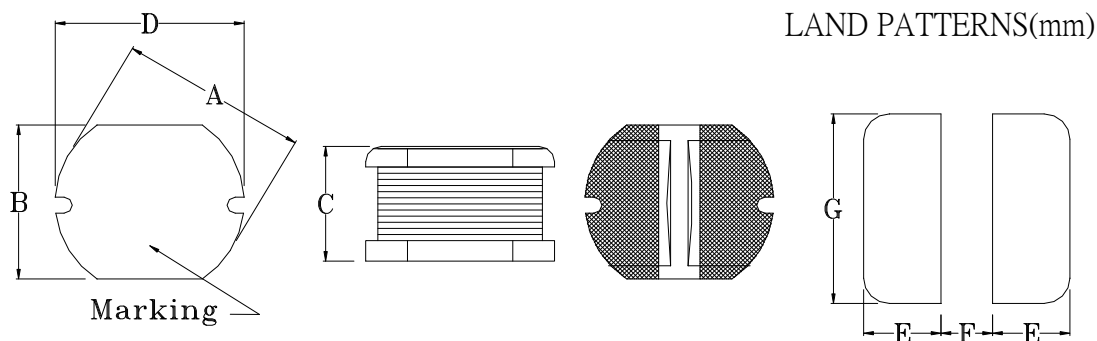

DIMENSIONS (mm)

Part No.	A	B	C	D	E	F	G
JTP 0504	5.8 ± 0.3	5.2 ± 0.3	4.5 ± 0.35	5.8 ± 0.3	1.80	1.90	5.00

SERIES LIST

No.	Part No.	L (μ H)	Test Frequency	RDC Max. (Ω)	IDC Max. (A)
1	JTP 0504-100K - ☐	10	2.52MHZ	0.10	1.44
2	JTP 0504-120K - ☐	12	2.52MHZ	0.12	1.40
3	JTP 0504-150K - ☐	15	2.52MHZ	0.14	1.30
4	JTP 0504-180K - ☐	18	2.52MHZ	0.15	1.23
5	JTP 0504-220K - ☐	22	2.52MHZ	0.18	1.11
6	JTP 0504-270K - ☐	27	2.52MHZ	0.20	0.97
7	JTP 0504-330K - ☐	33	2.52MHZ	0.23	0.88
8	JTP 0504-390K - ☐	39	2.52MHZ	0.32	0.80
9	JTP 0504-470K - ☐	47	2.52MHZ	0.37	0.72
10	JTP 0504-560K - ☐	56	2.52MHZ	0.42	0.68
11	JTP 0504-680K - ☐	68	2.52MHZ	0.46	0.61
12	JTP 0504-820K - ☐	82	2.52MHZ	0.60	0.58
13	JTP 0504-101K - ☐	100	1KHZ	0.70	0.52
14	JTP 0504-121K - ☐	120	1KHZ	0.93	0.48
15	JTP 0504-151K - ☐	150	1KHZ	1.10	0.40
16	JTP 0504-181K - ☐	180	1KHZ	1.38	0.38
17	JTP 0504-221K - ☐	220	1KHZ	1.57	0.35

Tolerance : K = $\pm 10\%$, K tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JTP 0504
Q'TY/Reel	1,500