


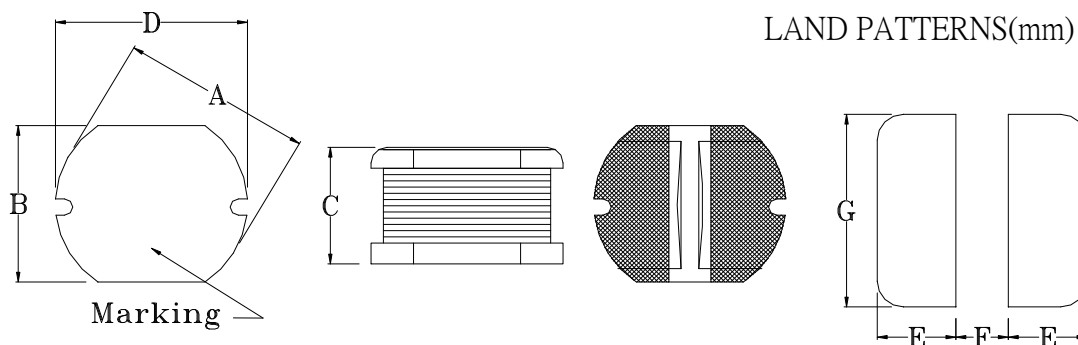

DIMENSIONS (mm)

Part No.	A	B	C	D	E	F	G
JTP 0302	3.5 ± 0.3	3.0 ± 0.3	2.3 ± 0.30	3.5 ± 0.3	1.40	0.80	3.00

SERIES LIST

No.	Part No.	L (μ H)	Test Frequency (KHz)	RDC Max. (Ω)	IDC Max. (A)
1	JTP 0302-100K - ☐	10	100	0.230	0.760
2	JTP 0302-120K - ☐	12	100	0.270	0.685
3	JTP 0302-150K - ☐	15	100	0.310	0.635
4	JTP 0302-180K - ☐	18	100	0.410	0.525
5	JTP 0302-220K - ☐	22	100	0.470	0.500
6	JTP 0302-270K - ☐	27	100	0.660	0.405
7	JTP 0302-330K - ☐	33	100	0.760	0.380
8	JTP 0302-390K - ☐	39	100	0.850	0.355
9	JTP 0302-470K - ☐	47	100	0.970	0.330
10	JTP 0302-560K - ☐	56	100	1.250	0.290
12	JTP 0302-680K - ☐	68	100	1.450	0.275
13	JTP 0302-820K - ☐	82	100	1.850	0.235
14	JTP 0302-101K - ☐	100	100	2.200	0.220
15	JTP 0302-121K - ☐	120	100	2.900	0.185
16	JTP 0302-151K - ☐	150	100	3.400	0.170
17	JTP 0302-181K - ☐	180	100	3.900	0.165
18	JTP 0302-221K - ☐	220	100	4.500	0.155
19	JTP 0302-271K - ☐	270	100	6.000	0.135
20	JTP 0302-331K - ☐	330	100	7.000	0.125
21	JTP 0302-391K - ☐	390	100	7.800	0.115

Tolerance : K = $\pm 10\%$, K tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JTP 0302
Q'TY/Reel	3,000