


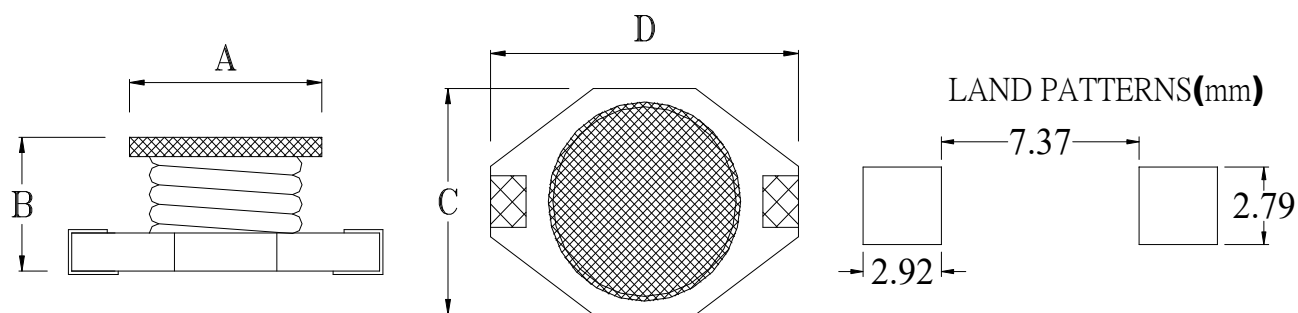

■ DIMENSIONS (mm)

Part No.	A	B	C	D
JSPK 0802	9.0 Max.	3.0 Max.	9.5 Max.	13.50 Max.

■ SERIES LIST

No.	Part No.	L (μ H)	RDC (Ω)	IDC (A)
1	JSPK 0802-100M - ☐	10	0.11	2.40
2	JSPK 0802-150M - ☐	15	0.15	2.00
3	JSPK 0802-220M - ☐	22	0.23	1.60
4	JSPK 0802-330M - ☐	33	0.30	1.40
5	JSPK 0802-470M - ☐	47	0.39	1.00
6	JSPK 0802-680M - ☐	68	0.66	0.90
7	JSPK 0802-101M - ☐	100	0.84	0.70

Test Frequency is 100KHz, DCR & IDC listed are all Max. Value.

Tolerance : M = $\pm 20\%$, M tolerance is standard.

☐ : Revision of specification

■ PACKAGE

Type	JSPK 0802
Q'TY/Reel	1,000