


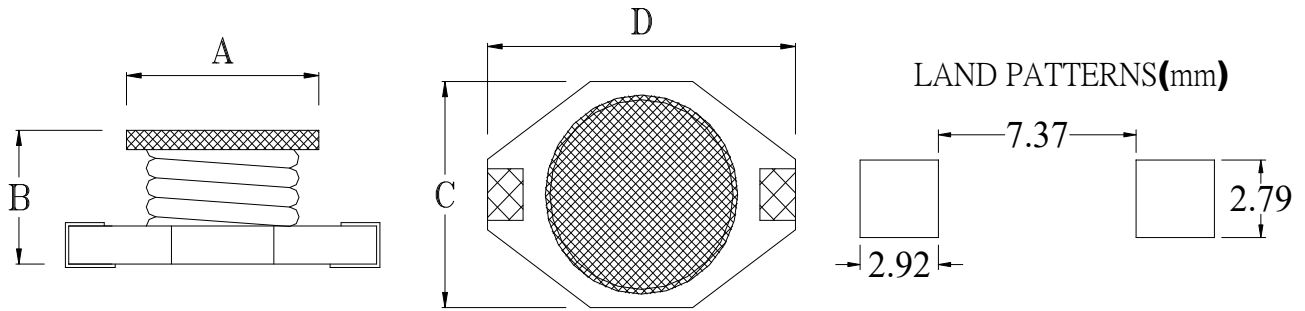

DIMENSIONS (mm)

Part No.	A	B	C	D
JSPK 0804	9.0 Max.	5.5 Max.	9.5 Max.	13.50 Max.

SERIES LIST

No.	Part No.	L (μ H)	RDC (Ω)	IDC (A)
1	JSPK 0804-3R3M - ☐	3.3	0.015	6.40
2	JSPK 0804-4R7M - ☐	4.7	0.018	5.40
3	JSPK 0804-6R8M - ☐	6.8	0.027	4.60
4	JSPK 0804-100M - ☐	10	0.038	3.80
5	JSPK 0804-150M - ☐	15	0.046	3.00
6	JSPK 0804-220M - ☐	22	0.085	2.60
7	JSPK 0804-330M - ☐	33	0.100	2.00
8	JSPK 0804-470M - ☐	47	0.140	1.60
9	JSPK 0804-680M - ☐	68	0.200	1.40
10	JSPK 0804-101M - ☐	100	0.280	1.20
11	JSPK 0804-151M - ☐	150	0.400	1.00
12	JSPK 0804-221M - ☐	220	0.610	0.80
13	JSPK 0804-331M - ☐	330	1.020	0.60
14	JSPK 0804-471M - ☐	470	1.270	0.50

Test Frequency is 100KHz, DCR & IDC listed are all Max. Value.

Tolerance : M = $\pm 20\%$, M tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JSPK 0804
Q'TY/Reel	1,000