


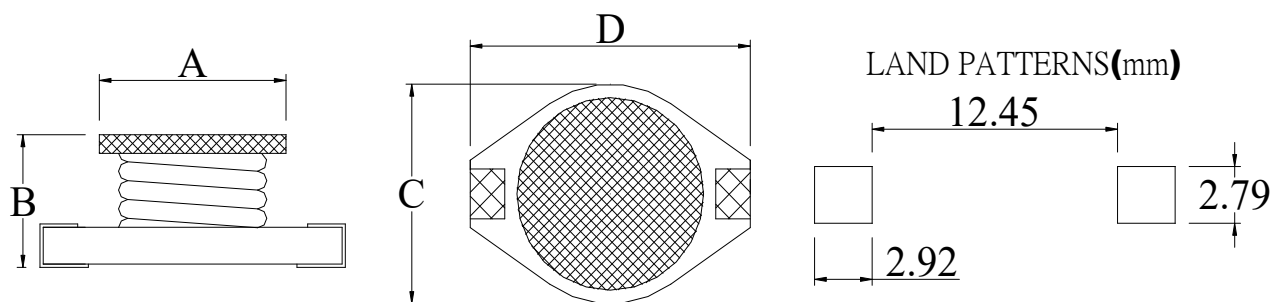

DIMENSIONS (mm)

Part No.	A	B	C	D
JSPK 1306	13.5 Max.	7.5 Max.	15.4 Max.	18.54 Max.

SERIES LIST

No.	Part No.	L (μ H)	RDC (Ω)	IDC (A)
1	JSPK 1306-100M - ☐	10	0.031	10.0
2	JSPK 1306-150M - ☐	15	0.036	8.0
3	JSPK 1306-220M - ☐	22	0.047	7.0
4	JSPK 1306-330M - ☐	33	0.066	5.5
5	JSPK 1306-470M - ☐	47	0.086	4.5
6	JSPK 1306-680M - ☐	68	0.130	3.5
7	JSPK 1306-101M - ☐	100	0.190	3.0
8	JSPK 1306-151M - ☐	150	0.250	2.6
9	JSPK 1306-221M - ☐	220	0.380	2.4
10	JSPK 1306-331M - ☐	330	0.560	1.9
11	JSPK 1306-471M - ☐	470	0.850	1.4
12	JSPK 1306-681M - ☐	680	1.100	1.2
13	JSPK 1306-102M - ☐	1000	1.800	1.0

Test Frequency is 100KHz, DCR & IDC listed are all Max. Value.

Tolerance : M = $\pm 20\%$, M tolerance is standard.

☐ : Revision of specification

PACKAGE

Type	JSPK 1306
Q'TY/Reel	250