


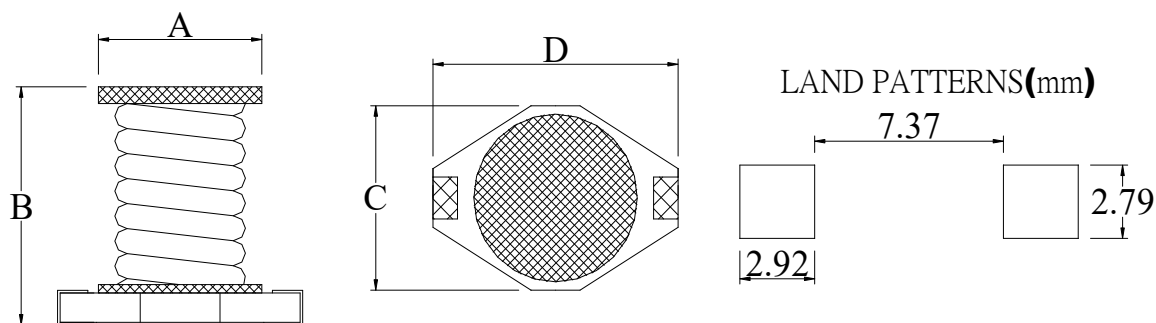

DIMENSIONS (mm)

Part No.	A	B	C	D
JSPK 0810	9.0 Max.	11.5 Max.	9.5 Max.	13.5 Max.

SERIES LIST

No.	Part No.	L (μ H)	RDC (Ω)	IDC (A)
1	JSPK 0810-100M - □	10	0.040	8.00
2	JSPK 0810-150M - □	15	0.050	7.00
3	JSPK 0810-220M - □	22	0.066	5.50
4	JSPK 0810-330M - □	33	0.080	4.00
5	JSPK 0810-470M - □	47	0.110	3.80
6	JSPK 0810-680M - □	68	0.170	3.00
7	JSPK 0810-101M - □	100	0.220	2.50
8	JSPK 0810-151M - □	150	0.340	2.00
9	JSPK 0810-221M - □	220	0.440	1.60
10	JSPK 0810-331M - □	330	0.700	1.20
11	JSPK 0810-471M - □	470	0.950	1.00
12	JSPK 0810-681M - □	680	1.200	1.00
13	JSPK 0810-102M - □	1000	2.000	0.80

Test Frequency is 100KHz, DCR & IDC listed are all Max. Value.

Tolerance : M = $\pm 20\%$, M tolerance is standard.

□ : Revision of specification

PACKAGE

Type	JSPK 0810
Q'TY/Reel	250