



PRODUCT IDENTIFICATION

JRPI	0412	V	-	2R2	M
Type	Size	Vehicle		Inductance	Tol.


FEATURES

1. Carbonyl Powder.
2. Compact design.
3. High current , low DCR , high efficiency.
4. Very low acoustic noise and very low leakage flux noise.
5. High reliability.
6. 100% Lead(Pb)-Free and RoHS compliant.
7. High reliability -Reliability test complied to AEC-Q200.


APPLICATIONS

Note PC power system , incl. IMVP-6
DC/DC converter .

DIMENSIONS (mm)

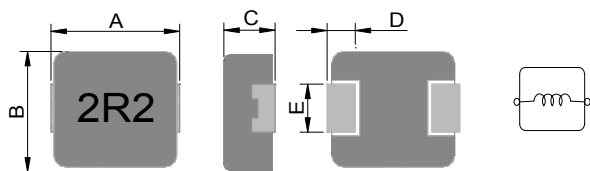

Recommend PC Board Pattern



Note:

1. The above PCB layout reference only.
2. Recommend solder paste thickness at 0.12mm and above.

Part No.	Size (mm)				
	A	B	C	D	E
JRPI 0412V	4.45 ± 0.25	4.06 ± 0.25	1.0 ± 0.2	0.76 ± 0.3	2.0 ± 0.2


SERIES LIST

No.	Part No.	L (μH)	TOL. (%)	RDC (mΩ)		I sat (A) Typ.	I rms (A) Typ.
				Typ.	Max.		
1	JRPI 0412V-R10N	0.10	±30	4.3	5.5	25	11.5
2	JRPI 0412V-R12M	0.12	±20	6.6	8	20	8.5
3	JRPI 0412V-R33M	0.33	±20	13.6	16	11	7.0
4	JRPI 0412V-R36M	0.36	±20	15.5	18	8.5	6.5
5	JRPI 0412V-R47M	0.47	±20	18	20	6.5	6.0
6	JRPI 0412V-R60M	0.60	±20	22.5	26	6.0	5.3
7	JRPI 0412V-R68M	0.68	±20	32	37	6.0	5.0
8	JRPI 0412V-1R0M	1.00	±20	41	47	6.0	4.0
9	JRPI 0412V-1R2M	1.20	±20	48	56	5.0	3.5
10	JRPI 0412V-1R5M	1.50	±20	55	63.3	4.0	3.0
11	JRPI 0412V-2R2M	2.20	±20	69.2	80	3.5	2.8
12	JRPI 0412V-3R3M	3.30	±20	84	97	3.0	2.3
13	JRPI 0412V-4R7M	4.70	±20	128	145	2.5	2.0
14	JRPI 0412V-5R6M	5.60	±20	180	208	2.3	1.7
15	JRPI 0412V-6R8M	6.80	±20	300	360	1.7	1.5
16	JRPI 0412V-8R2M	8.20	±20	313	376	1.6	1.4
17	JRPI 0412V-100M	10.0	±20	410	463	1.4	1.3
18	JRPI 0412V-220M	22.0	±20	950	1050	1.0	0.8

Note:






1. Test Frequency: 100KHz /1V
2. All test data referenced to 25°C ambient
3. Isat : Based on inductance change ($\Delta L/L_0 : \leq 30\%$)
4. Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40°C
5. The part temperature (ambient + temp rise) should not exceed 125°C under worst case operating conditions.
Circuit design,component,PCB trace size and thickness,airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
6. Special inquiries besides the above common used types can be met on your requirement.








Materials



NO	Items	Materials
1	Core	Carbonyl Powder.
2	Wire	Polyester Wire or equivalent.
3	Clip	100% Pb free solder(Ni+Sn---Plating)
4	paint	Epoxy resin
5	Ink	Halogen-free ketone


TYPICAL PERFORMANCE CURVES

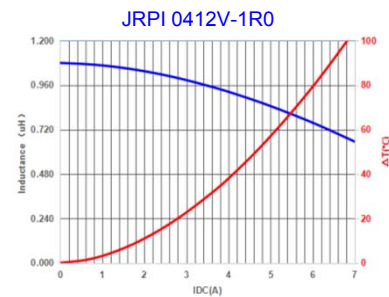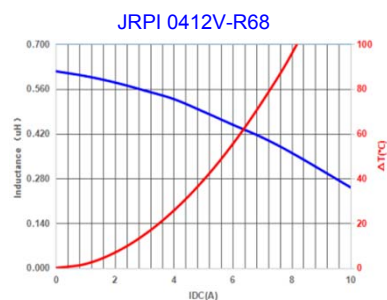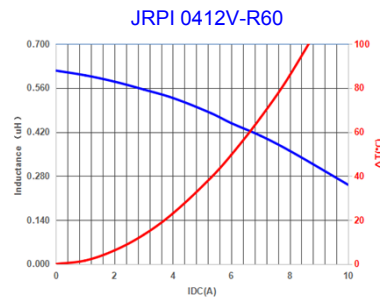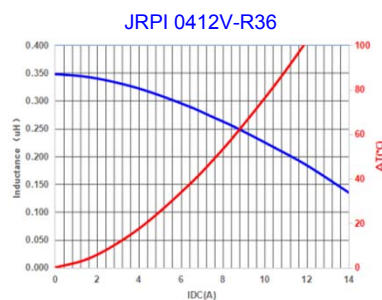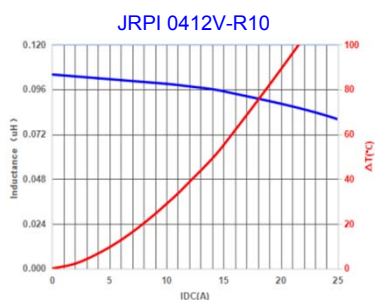

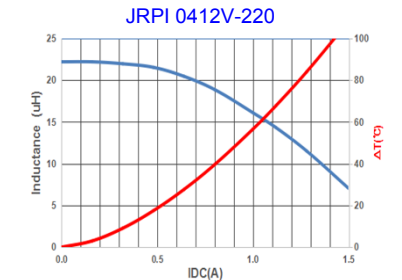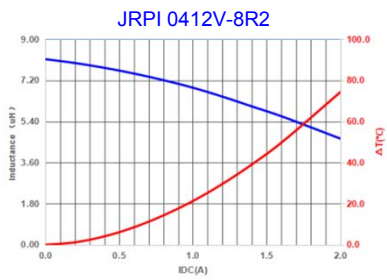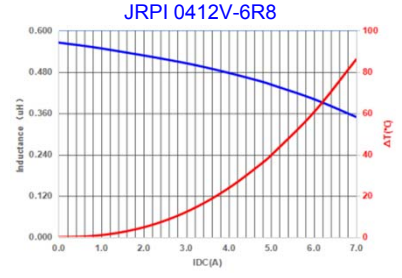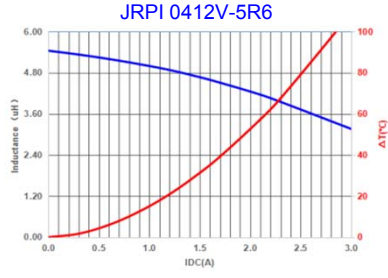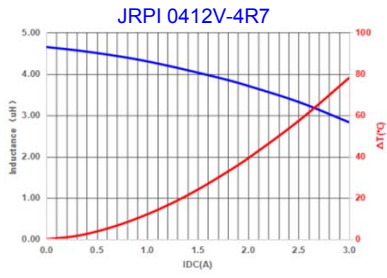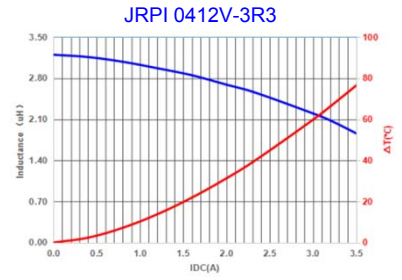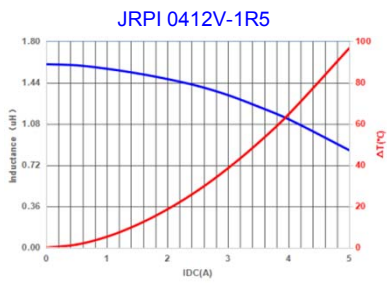


Packaging Information

• Reel Dimension

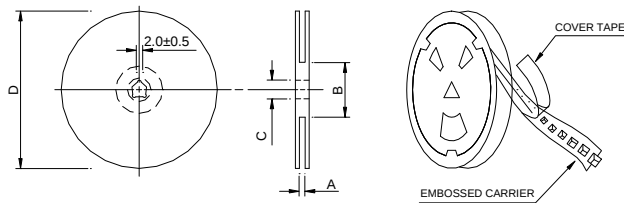

Type	A(mm)	B(mm)	C(mm)	D(mm)
13"x12mm	12.4+2/-0	100±2	13+0.5/-0.2	330

• Tape Dimension

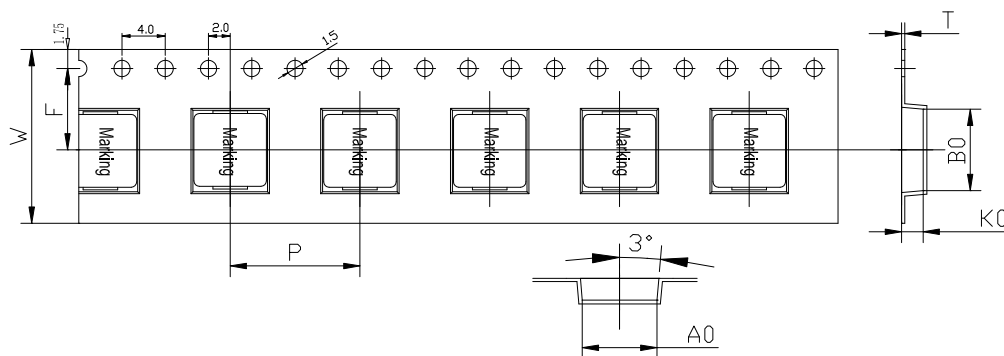


Ao(mm)	Bo(mm)	Ko(mm)	P(mm)	W(mm)	F(mm)	t(mm)
4.40±0.1	5.0±0.1	1.5±0.1	8.0±0.1	12±0.3	5.5±0.1	0.35±0.05

• Packaging Quantity

Size	Reel	Inner box	Carton
JRPI 0412V	4000	8000	32000

• Tearing Off Force

The force for tearing off cover tape is 10 to 130 grams in the arrow direction under the following conditions (referenced ANSI/EIA-481-C-2003 of 4.11 standard)

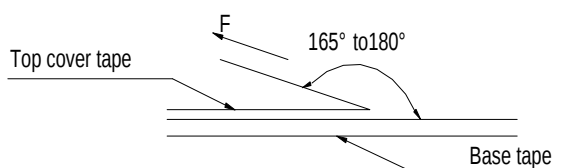

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed mm/min
5~35	45~85	860~1060	300

■ Application Notice

- Storage Conditions(component level)

To maintain the solderability of terminal electrodes:

1. Products meet IPC/JEDEC J-STD-020D standard-MSL, level 1.
2. Temperature and humidity conditions: Less than 40°C and 60% RH.
3. Recommended products should be used within 12 months form the time of delivery.
4. The packaging material should be kept where no chlorine or sulfur exists in the air.

- Transportation

1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
3. Bulk handling should ensure that abrasion and mechanical shock are minimized.