



PRODUCT IDENTIFICATION

JRPI	0618	V	-	100	M
Type	Size	Vehicle		Inductance	Tol.

FEATURES


1. Carbonyl Powder.
2. Compact design.
3. High current , low DCR , high efficiency.
4. Very low acoustic noise and very low leakage flux noise.
5. High reliability.
6. 100% Lead(Pb)-Free and RoHS compliant.
7. High reliability -Reliability test complied to AEC-Q200.

Marking and Date code:

Marking ex:10(μH) → 100

Date code


18 16 → year and weekly




APPLICATIONS

Note PC power system , incl. IMVP-6
DC/DC converter .

DIMENSIONS (mm)

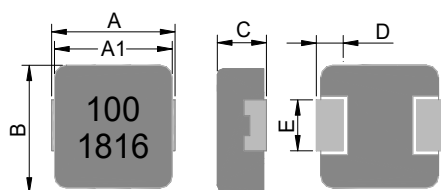

Recommend PC Board Pattern



Note:

1. The above PCB layout reference only.
2. Recommend solder paste thickness at 0.15mm and above.

印字:黑色100及D/C 1816 (18年,16週期)(依實際生產日期而定)

Part No.	Size (mm)					
	A	A1	B	C	D	E
JRPI 0618V	7.0 ± 0.3	6.7 ± 0.3	6.6 ± 0.3	1.6 ± 0.2	1.8 ± 0.3	3.0 ± 0.3

SERIES LIST


No.	Part No.	L (μH)	TOL. (%)	RDC (mΩ)		I sat (A) Typ.	I rms (A) Typ.
				Typ.	Max.		
1	JRPI 0618V-R10N	0.10	±30	2.1	2.5	45.0	18.0
2	JRPI 0618V-R15M	0.15	±20	2.2	2.6	34.0	18.0
3	JRPI 0618V-R18N	0.18	±30	2.5	3.0	32.0	17.0
4	JRPI 0618V-R22M	0.22	±20	2.5	3.0	26.0	16.0
5	JRPI 0618V-R33M	0.33	±20	4.8	5.8	22.0	14.0
6	JRPI 0618V-R47M	0.47	±20	6.4	7.4	18.0	12.0
7	JRPI 0618V-R56M	0.56	±20	8.5	10.0	17.5	11.0
8	JRPI 0618V-R68M	0.68	±20	9.5	11.0	17.0	10.0
9	JRPI 0618V-R82M	0.82	±20	11.5	14.0	15.5	8.5
10	JRPI 0618V-1R0M	1.00	±20	14.5	17.0	14.0	7.0
11	JRPI 0618V-1R2M	1.20	±20	20.0	24.0	13.5	6.5
12	JRPI 0618V-1R5M	1.50	±20	21.0	25.2	13.0	6.0
13	JRPI 0618V-2R2M	2.20	±20	31.0	35.0	11.0	6.0
14	JRPI 0618V-3R3M	3.30	±20	40.0	46.0	9.0	5.0
15	JRPI 0618V-4R7M	4.70	±20	68.0	76.0	7.0	4.0
16	JRPI 0618V-5R6M	5.60	±20	78.0	86.0	6.0	3.5

No.	Part No.	L (μ H)	TOL. (%)	RDC (m Ω)		I sat (A)	
				Typ.	Max.	Typ.	Typ.
17	JRPI 0618V-6R8M	6.80	± 20	93.0	104	5.5	3.0
18	JRPI 0618V-8R2M	8.20	± 20	123	140	4.5	2.6
19	JRPI 0618V-100M	10.0	± 20	143	160	3.5	2.3
20	JRPI 0618V-150M	15.0	± 20	240	280	3.0	2.0
21	JRPI 0618V-220M	22.0	± 20	300	360	2.5	1.8
22	JRPI 0618V-330M	33.0	± 20	550	650	2.1	1.3

Note:


1. Test Frequency: 100KHz /1V
2. All test data referenced to 25°C ambient
3. Saturation Current (Isat) will cause L0 to drop approximately 30%.
4. Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40°C
5. The part temperature (ambient + temp rise) should not exceed 125°C under worst case operating conditions.
Circuit design, component, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
6. Special inquiries besides the above common used types can be met on your requirement.

Materials




NO	Items	Materials
1	Core	Carbonyl Powder
2	Wire	Polyester Wire or equivalent
3	Clip	100% Pb free solder(Ni+Sn---Plating)
4	paint	Epoxy resin
5	Ink	Halogen-free ketone


TYPICAL PERFORMANCE CURVES

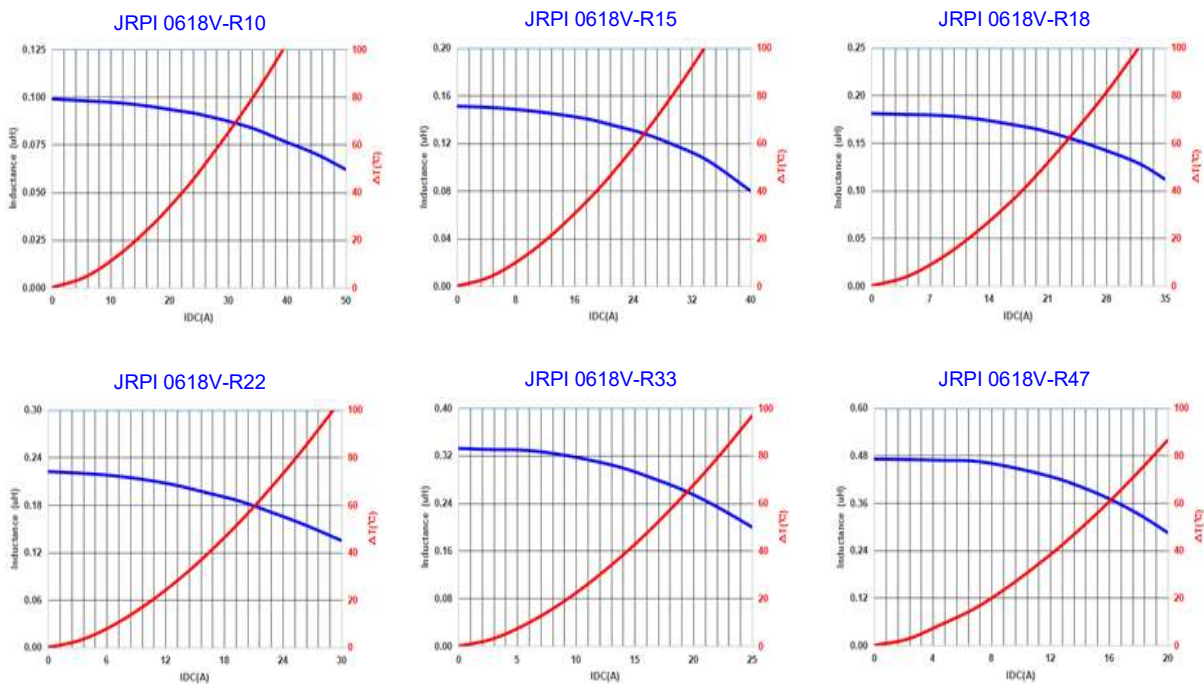


JRPI 0618V-R56

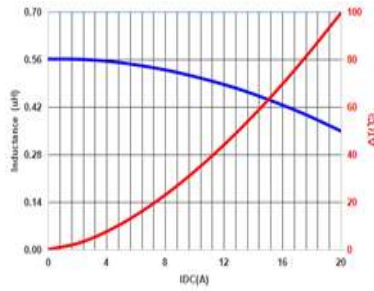


JRPI 0618V-R68

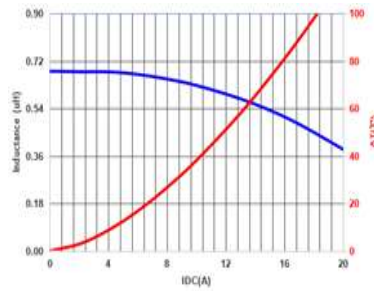


JRPI 0618V-R82

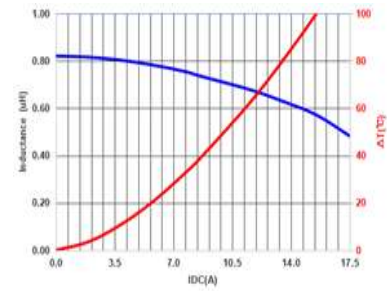


JRPI 0618V-1R0

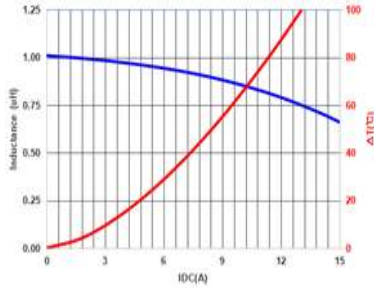


JRPI 0618V-1R2

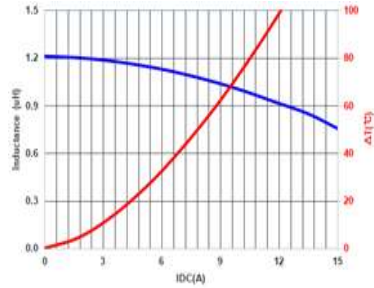


JRPI 0618V-1R5

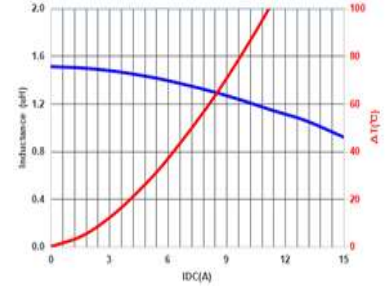


JRPI 0618V-2R2

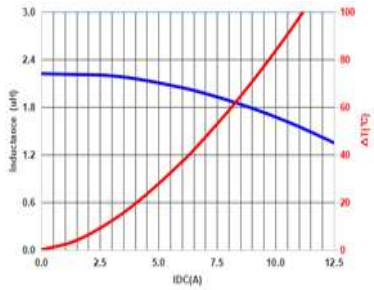


JRPI 0618V-3R3

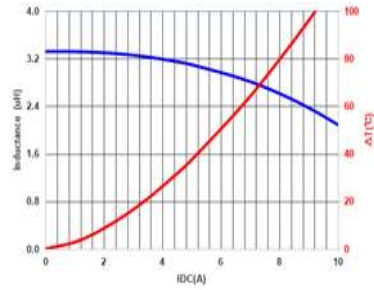


JRPI 0618V-4R7

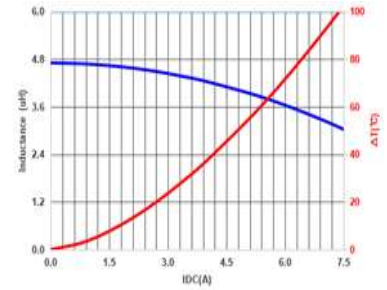


JRPI 0618V-5R6

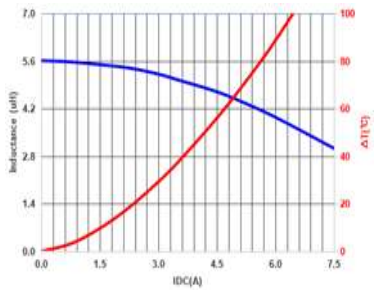


JRPI 0618V-6R8

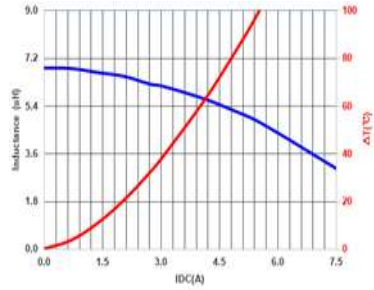


JRPI 0618V-8R2

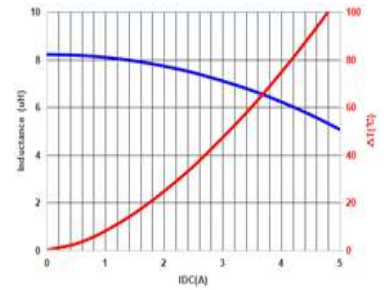


JRPI 0618V-100

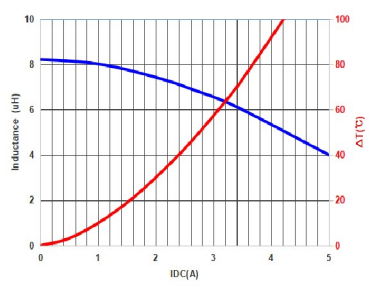


JRPI 0618V-150

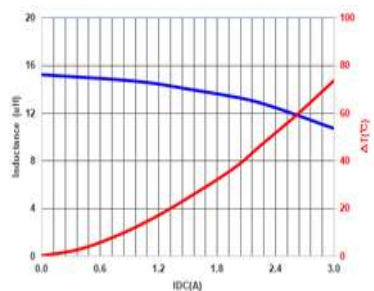

JRPI 0618V-220

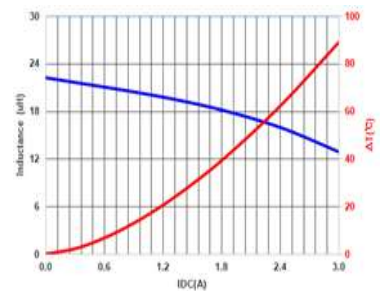


JRPI 0618V-330

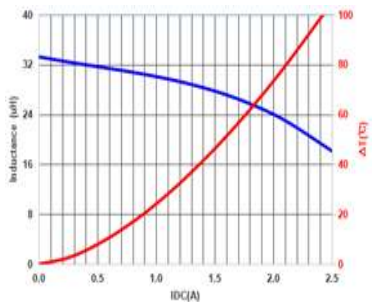


Packaging Information

• Reel Dimension

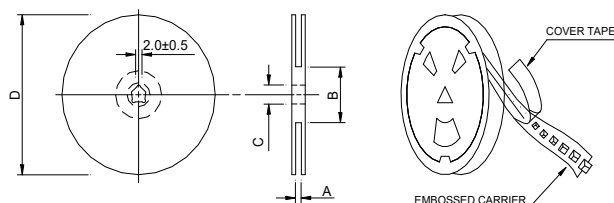

Type	A(mm)	B(mm)	C(mm)	D(mm)
13"x16mm	16.4+2/-0	100±2	13+0.5/-0.2	330

• Tape Dimension

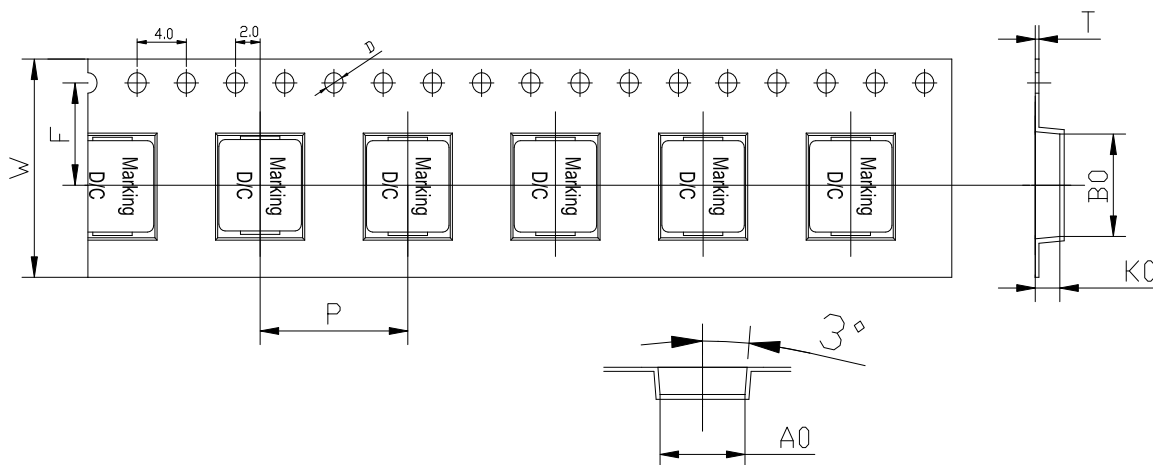


Ao(mm)	Bo(mm)	Ko(mm)	P(mm)	W(mm)	F(mm)	t(mm)	D(mm)
7.0±0.1	7.7±0.1	2.1±0.1	12.0±0.1	16±0.3	7.5±0.1	0.35±0.05	1.5±0.1

• Packaging Quantity

Size	Reel	Inner box	Carton
JRPI 0618V	2000	4000	16000

• Tearing Off Force

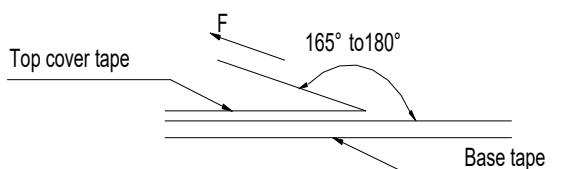

The force for tearing off cover tape is 10 to 130 grams in the arrow direction under the following conditions (referenced ANSI/EIA-481-C-2003 of 4.11 standard)

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed mm/min
5~35	45~85	860~1060	300

■ Application Notice

- Storage Conditions(component level)

To maintain the solderability of terminal electrodes:

1. Products meet IPC/JEDEC J-STD-020D standard-MSL, level 1.
2. Temperature and humidity conditions: Less than 40°C and 60% RH.
3. Recommended products should be used within 12 months form the time of delivery.
4. The packaging material should be kept where no chlorine or sulfur exists in the air.

- Transportation

1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
3. Bulk handling should ensure that abrasion and mechanical shock are minimized.