


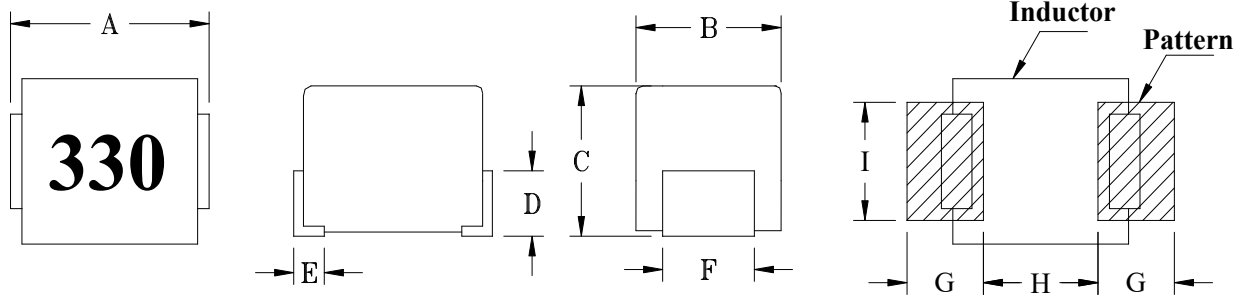

Unit: mm

Part No.	A	B	C	D	E	F	G	H	I
JWI 322522T	3.2 ± 0.3	2.5 ± 0.2	2.2 ± 0.2	0.6 ref	0.2 min	1.9 ± 0.1	1.2	2.0	2.0

No.	Part No.	Inductance (μ H)	Q Min.	Test Frequency (MHz)	SRF Min. (MHz)	RDC Max. (Ω)	IDC Max. (mA)
1	JWI 322522T-R12J	0.12	30	25.2	500	0.22	450
2	JWI 322522T-R15J	0.15	30	25.2	450	0.25	450
3	JWI 322522T-R18J	0.18	30	25.2	400	0.28	450
4	JWI 322522T-R22J	0.22	30	25.2	350	0.32	450
5	JWI 322522T-R27J	0.27	30	25.2	320	0.36	450
6	JWI 322522T-R33J	0.33	30	25.2	300	0.40	450
7	JWI 322522T-R39J	0.39	30	25.2	250	0.45	450
8	JWI 322522T-R47J	0.47	30	25.2	220	0.50	450
9	JWI 322522T-R56J	0.56	30	25.2	180	0.55	450
10	JWI 322522T-R68J	0.68	30	25.2	160	0.60	450
11	JWI 322522T-R82J	0.82	30	25.2	140	0.65	450
12	JWI 322522T-1R0J	1.0	30	7.96	120	0.70	400
13	JWI 322522T-1R2J	1.2	30	7.96	100	0.75	390
14	JWI 322522T-1R5J	1.5	30	7.96	85	0.85	370
15	JWI 322522T-1R8J	1.8	30	7.96	80	0.90	350
16	JWI 322522T-2R2J	2.2	30	7.96	75	1.00	320
17	JWI 322522T-2R7J	2.7	30	7.96	70	1.10	290
18	JWI 322522T-3R3J	3.3	30	7.96	60	1.20	260
19	JWI 322522T-3R9J	3.9	30	7.96	55	1.30	250
20	JWI 322522T-4R7J	4.7	30	7.96	50	1.50	220
21	JWI 322522T-5R6J	5.6	30	7.96	45	1.60	200
22	JWI 322522T-6R8J	6.8	30	7.96	40	1.80	180
23	JWI 322522T-8R2J	8.2	30	7.96	35	2.00	170
24	JWI 322522T-100J	10	30	2.52	30	2.10	150
25	JWI 322522T-120J	12	30	2.52	20	2.50	140
26	JWI 322522T-150J	15	30	2.52	20	2.80	130
27	JWI 322522T-180J	18	30	2.52	20	3.30	120
28	JWI 322522T-220J	22	30	2.52	20	3.70	110
29	JWI 322522T-270J	27	30	2.52	18	5.00	80
30	JWI 322522T-330J	33	30	2.52	17	5.60	70

□ Tolerance : J = ± 5% ; K = ± 10% ; M = ± 20% , K tolerance is standard.

No.	Part No.	Inductance (μ H)	Q Min.	Test Frequency (MHz)	SRF Min. (MHz)	RDC Max. (Ω)	IDC Max. (mA)
31	JWI 322522T-390J	39	30	2.52	16	6.4	65
32	JWI 322522T-470J	47	30	2.52	15	7.0	60
33	JWI 322522T-560J	56	30	2.52	13	8.0	55
34	JWI 322522T-680J	68	30	2.52	12	9.0	50
35	JWI 322522T-820J	82	30	2.52	11	10	45
36	JWI 322522T-101J	100	20	0.796	10	10	40
37	JWI 322522T-121J	120	20	0.796	9	11	70
38	JWI 322522T-151J	150	20	0.796	7	15	65
39	JWI 322522T-181J	180	20	0.796	7	17	60
40	JWI 322522T-221J	220	20	0.796	6	21	50
41	JWI 322522T-271J	270	20	0.796	5	28	45
42	JWI 322522T-331J	330	20	0.796	5	34	40

☐ Tolerance : J = $\pm$ 5% ; K = $\pm$ 10% ; M = $\pm$ 20% , K tolerance is standard.

■ PACKAGE

Type	JWI 322522T
Q'TY/Reel	2000
Reel size	7"