


DIMENSIONS (mm)

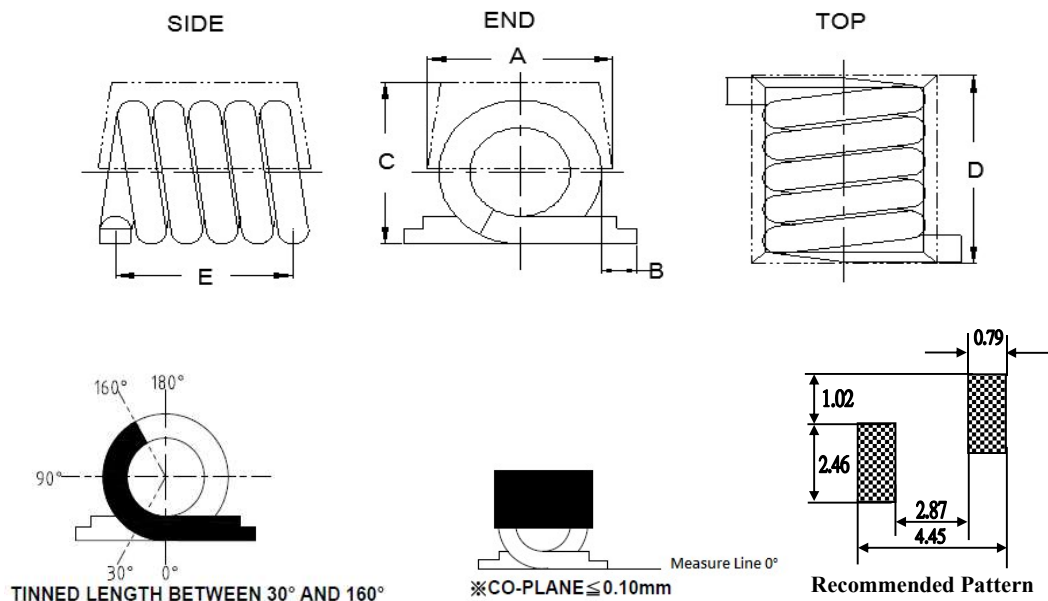

Part No.	Size (mm)				
	A	B	C	D	E
JAS 292B	1.42 ± 0.13	0.89 ± 0.25	1.37 ± 0.15	4.04 ± 0.30	3.66 ± 0.30



SERIES LIST

Part No	L (nH)	TOL.	Q Min.	Test Freq. (MHz)	RDC (mΩ) Max.	SRF (GHz) Min.	IDC (A) Max.
JAS 292B-06□	5.60	G,J,K	100	800	9.0	6.5	1.6
JAS 292B-07□	7.15	G,J,K	100	800	10.0	6.0	1.6
JAS 292B-08□	8.80	G,J,K	100	800	12.0	6.0	1.6
JAS 292B-09□	9.85	G,J,K	100	800	13.0	5.2	1.6
JAS 292B-10□	12.55	G,J,K	100	800	14.0	4.6	1.6

Note:


- Tolerance : G ± 2% , J ± 5% , K ± 10%
- Electrical specifications at 25°C.
- Operating temperature range : -40°C to +125°C.

■ Typical Performance Curves

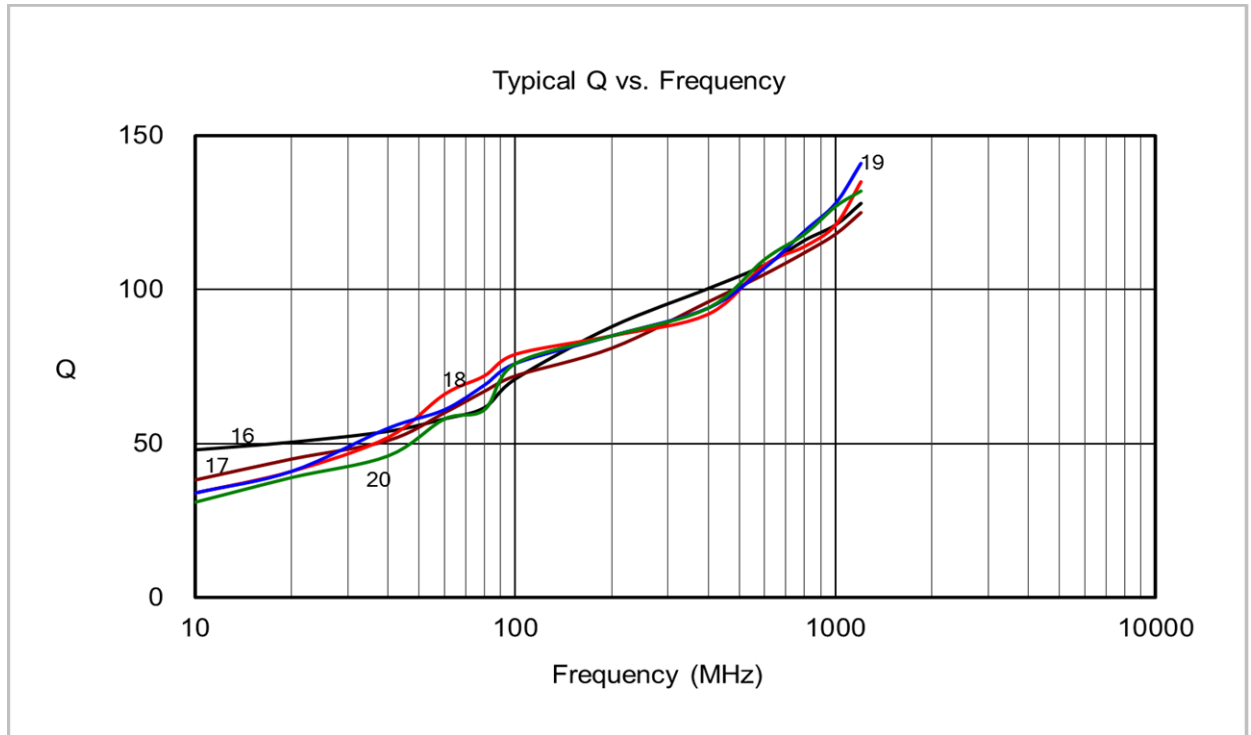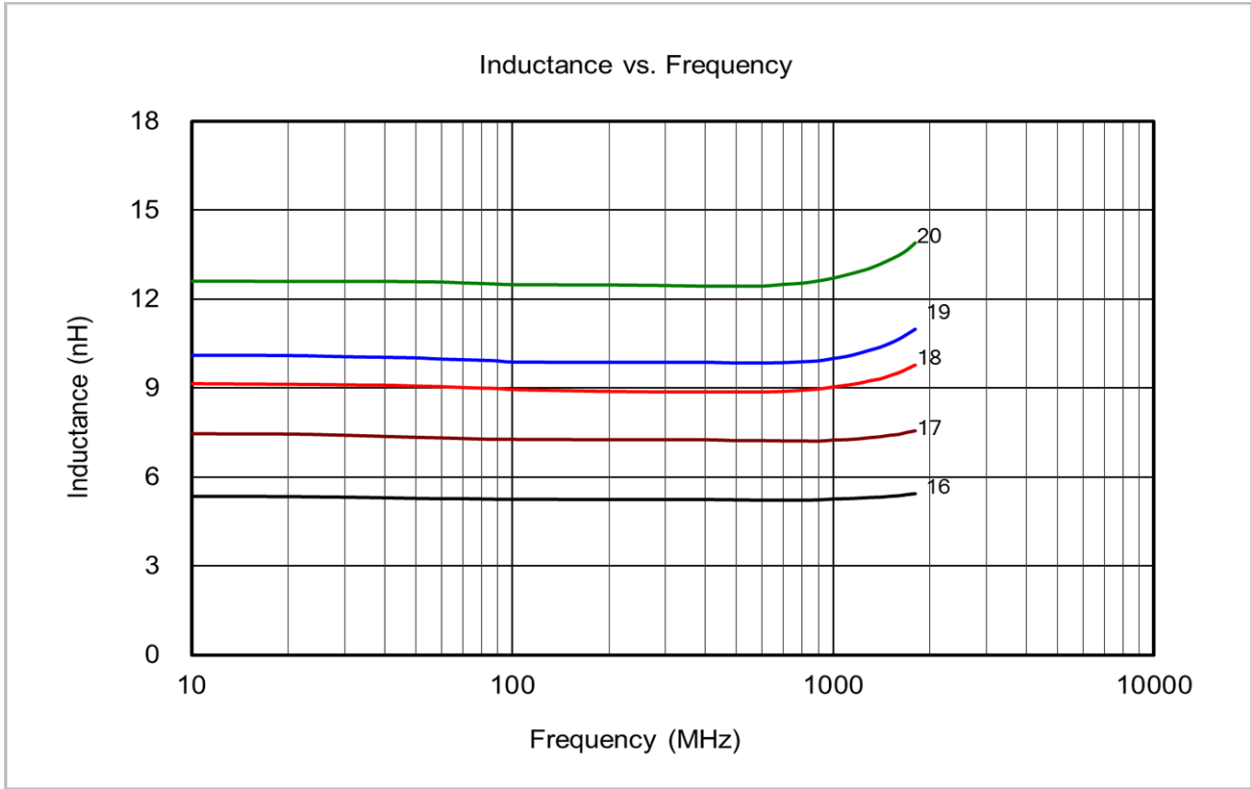


Packaging Information

TEARING OFF FORCE

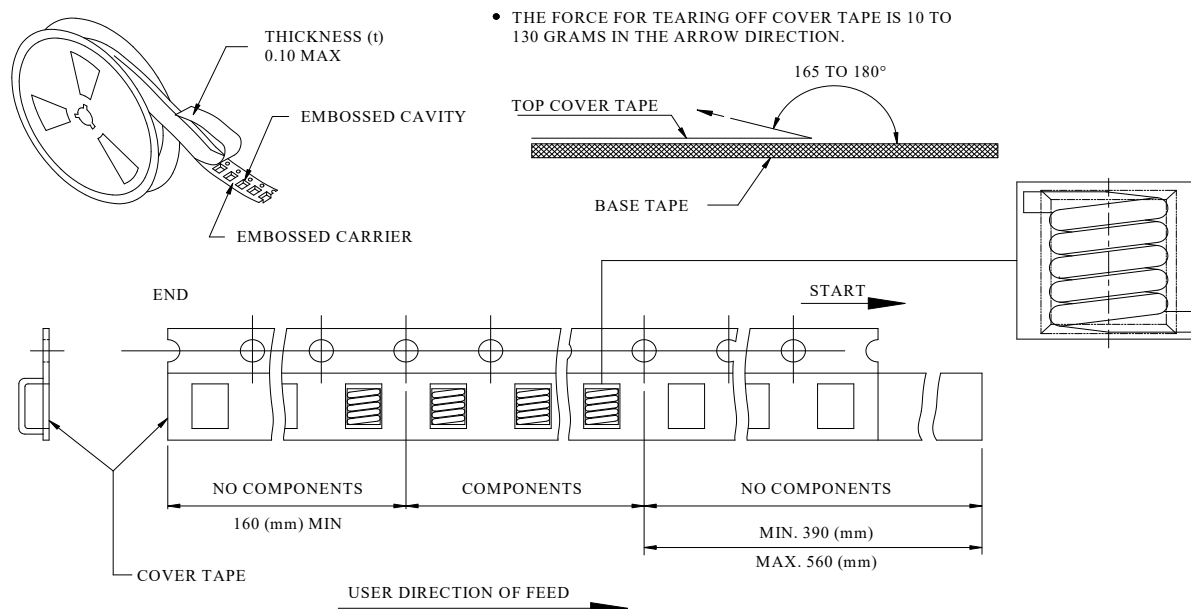


■ CARRIER TAPE REELS (mm)

MATERIAL: PLASTIC

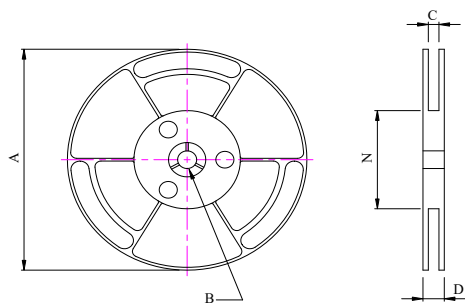


■ DIMENSIONS OF CARRIER TAPE (mm)

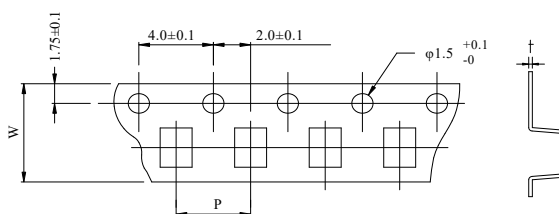


	A	B	C	D	N	t	P	W
DIM.	180	13	12.4	18.4	50	0.35	8	12
TOL.	MAX.	+0.5 / -0.2	+2.0 / -0	MAX.	MIN.	±0.05	±0.10	±0.30

UNIT : mm

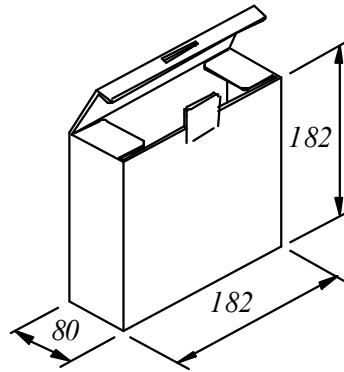

- CONSTRUCTION:
THE CASE CONTAINS 3-12mm WIDE CARRIER TAPES.
Q'TY : 2,000 / REEL

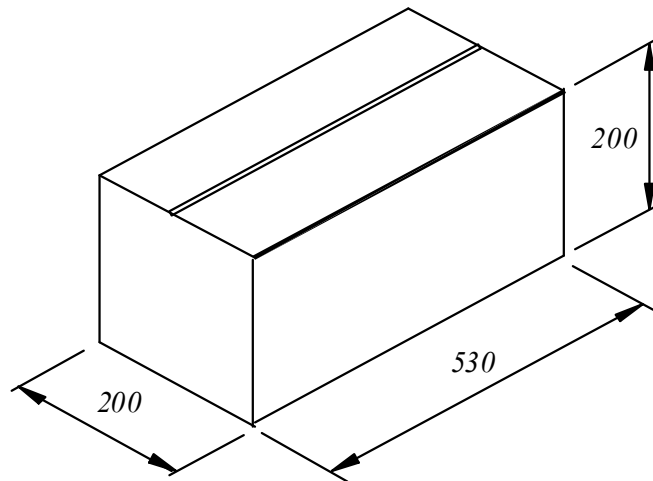

TOTAL Q'TY : 36,000 PCS