


DIMENSIONS (mm)

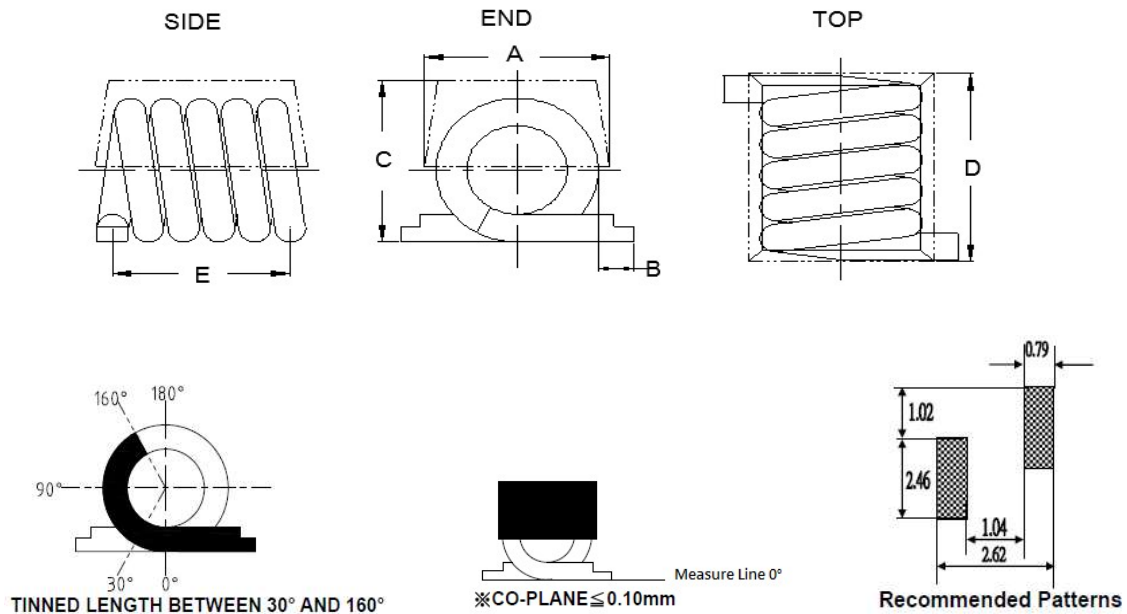

Part No.	Size (mm)				
	A	B	C	D	E
JAS 292A	1.42 ± 0.13	0.89 ± 0.25	1.37 ± 0.15	2.21 ± 0.25	1.83 ± 0.25



SERIES LIST

Part No	L (nH)	TOL.	Q Min.	Test Freq. (MHz)	RDC (mΩ) Max.	SRF (GHz) Min.	IDC (A) Max.
JAS 292A-02□	1.65	G,J,K	100	800	4.0	10.0	1.6
JAS 292A-03□	2.55	G,J,K	100	800	5.0	8.2	1.6
JAS 292A-04□	3.85	G,J,K	100	800	6.0	7.5	1.6
JAS 292A-05□	5.40	G,J,K	100	800	8.0	7.0	1.6

Note:


1. □ Tolerance : G ± 2% , J ± 5% , K ± 10%
2. Electrical specifocations at 25°C .
3. Operating temperature range : -40°C to +125°C .

■ Typical Performance Curves

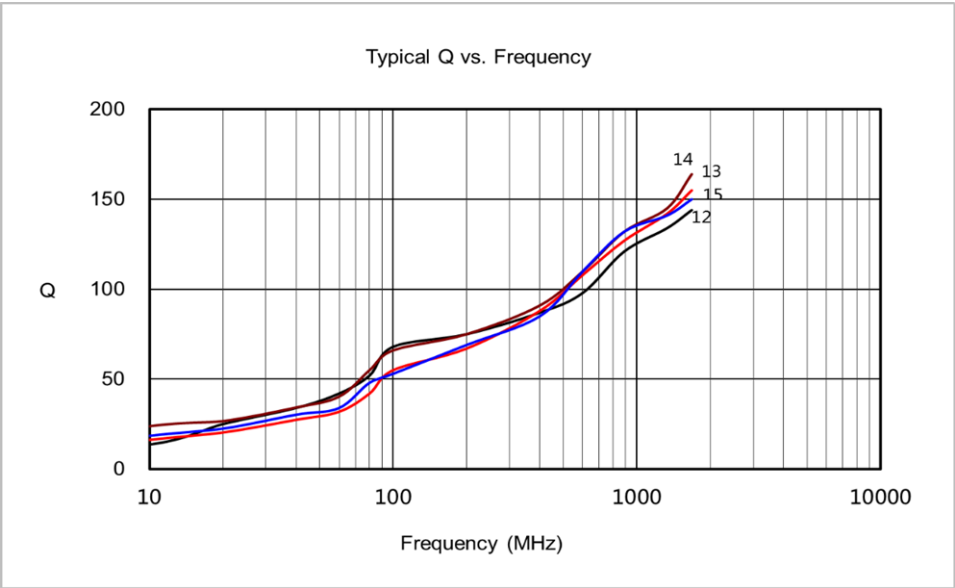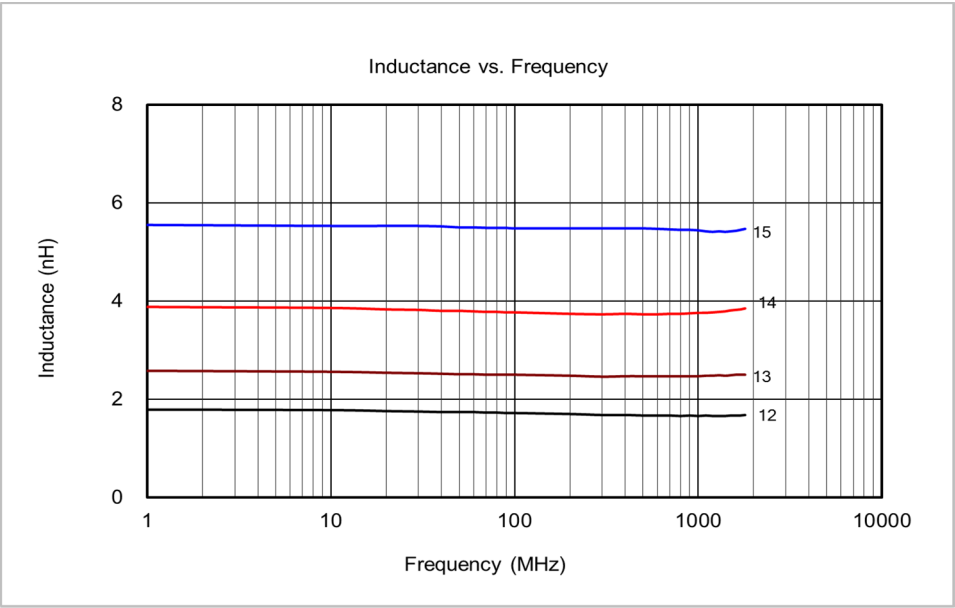


Packaging Information

TEARING OFF FORCE

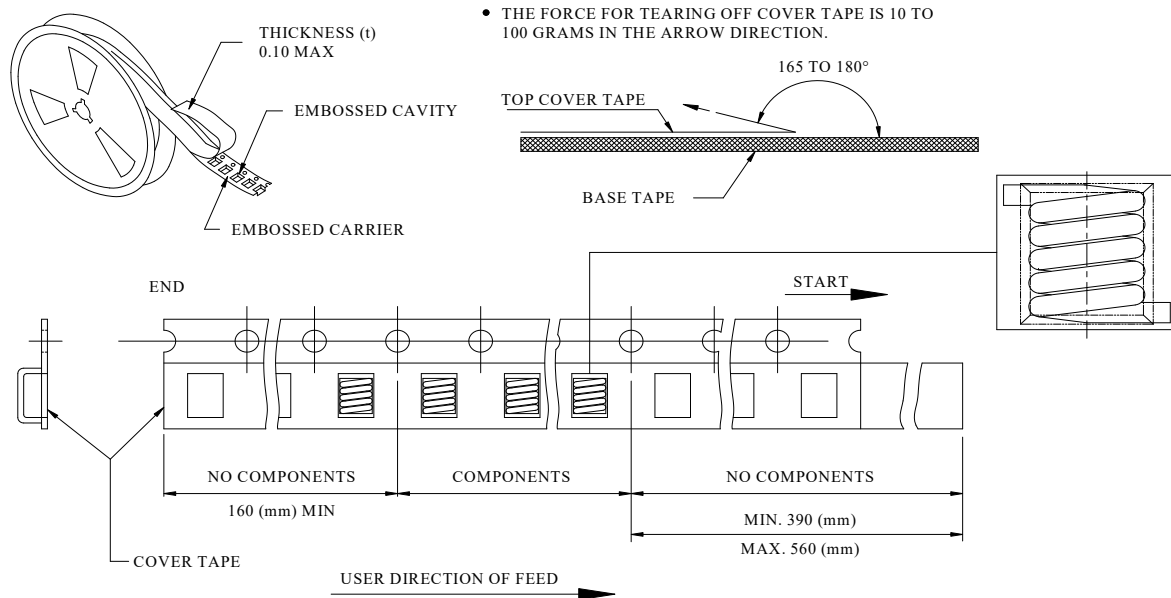


■ CARRIER TAPE REELS (mm)

MATERIAL: PLASTIC

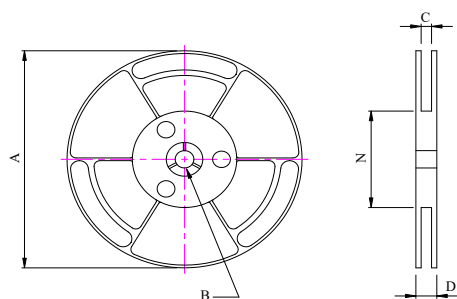


■ DIMENSIONS OF CARRIER TAPE (mm)

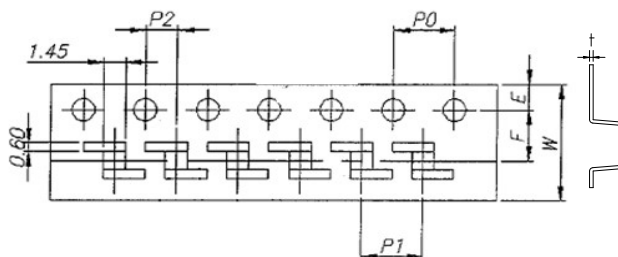


	A	B	C	D	N	E	F	W	P0	P1	P2	t
DIM.	178	13	8.4	12.5	75	1.75	3.5	8.0	4.0	4.0	2.0	0.3
TOL.	±2.0	±0.8	+1.5 / -0	+1.5 / -0	±2.0	±0.10	±0.10	±0.20	±0.10	±0.10	±0.10	±0.05

UNIT : mm

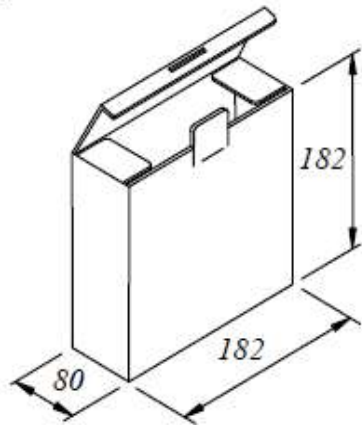

- CONSTRUCTION:
THE CASE CONTAINS 5-8mm WIDE CARRIER TAPES.
Q'TY : 2,000 / REEL

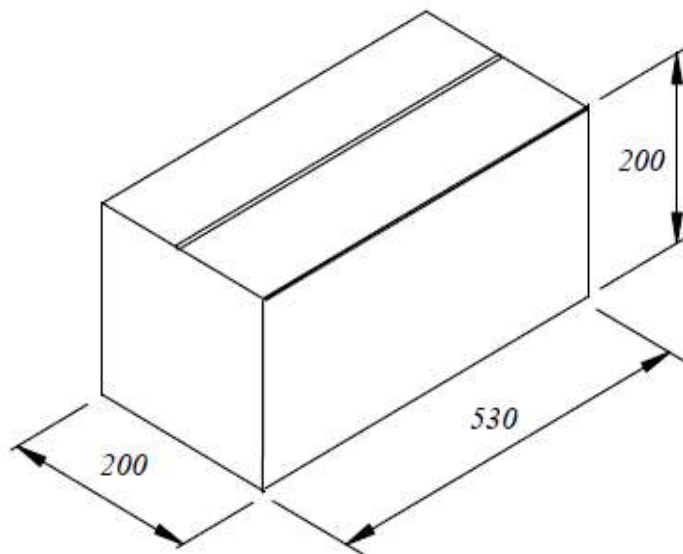

TOTAL Q'TY : 60,000 PCS