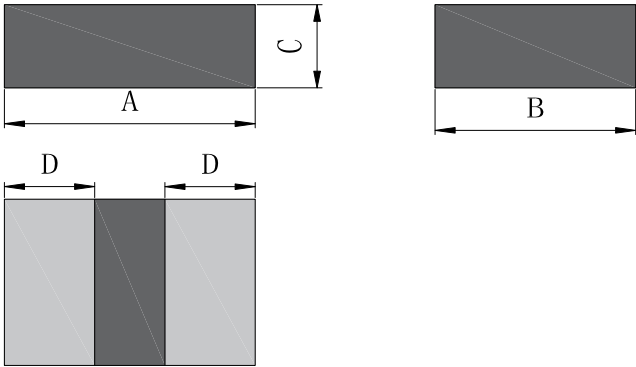


# SPECIFICATION FOR APPROVAL

|           |                                                                                        |          |                |
|-----------|----------------------------------------------------------------------------------------|----------|----------------|
| COMMODITY | Mini Molding SMD Power Coils                                                           | SPEC NO. | SP-0230508004  |
| ITEM      | JRIM 201210HL-R10M <span style="border: 1px solid black; padding: 0 2px;">Green</span> | 版本：A     | 表單編號：QR-012-02 |

| (1) DIMENSION: (UNIT: mm)                                                         |   | DIM. | TOL.  |
|-----------------------------------------------------------------------------------|---|------|-------|
|  | A | 2.00 | ±0.30 |
|                                                                                   | B | 1.20 | ±0.30 |
|                                                                                   | C | 0.80 | ±0.20 |
|                                                                                   | D | 0.70 | ±0.30 |
|                                                                                   |   |      |       |
|                                                                                   |   |      |       |
|                                                                                   |   |      |       |
|                                                                                   |   |      |       |
|                                                                                   |   |      |       |
|                                                                                   |   |      |       |

| (2) ELECTRICAL CHARACTERISTIC |                        |     | TEST INSTRUMENTS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUCTANCE                    | 0.10 ± 20%             | μ H | <input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer<br><input type="checkbox"/> Agilent 4287A RF LCR Meter<br><input type="checkbox"/> AGILENT 4285A Precision L.C.R.<br><input type="checkbox"/> HP-4286A RF L.C.R. Meter.<br><input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer.<br><input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.<br><input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.<br><input checked="" type="checkbox"/> BK PRECISION 2840 DC Resistance Meter<br><input type="checkbox"/> ZENTECH 502AC Resistance Merter<br><input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter<br><input type="checkbox"/> WAYNE KERR HI-POT TESTER 7600 |
| TEST FREQUENCY                | 1                      | MHz |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| TEST VOLT                     | 1                      | V   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| RDC                           | 8 (typ)<br>13 (max)    | mΩ  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Isat                          | 8.5 (typ)<br>8.0 (max) | A   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Irms                          | 7.5 (typ)<br>7.0 (max) | A   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                               |                        |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                               |                        |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## REMARK :

1. All test data referenced to 25°C ambient
2. Saturation Current (Isat) will cause L0 to drop approximately 30%.
3. Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40°C


## PURCHASER CONFIRMED :

| APPROVED                                                                             | CHECKED                                                                               | DRAWN                                                                                 |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |

# TEST REPORT

SPEC NO : SP-0230508004

Typical Performance Curves

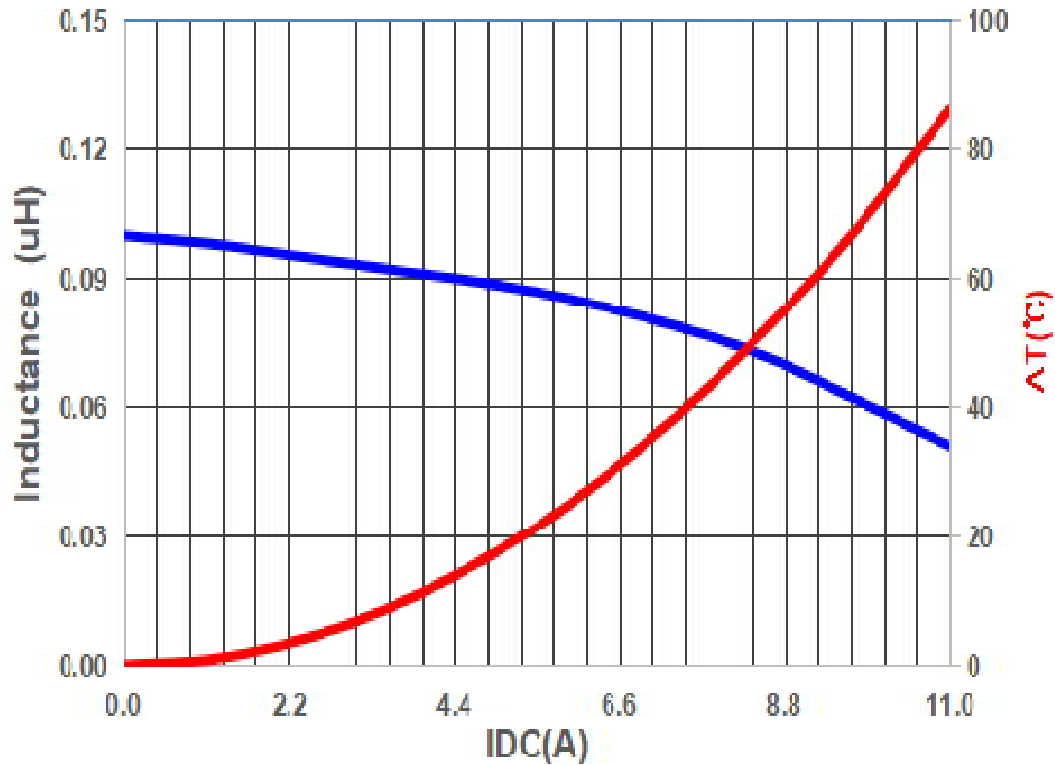

Test Instrument :

ZENTECH 3302 Automatic Components Analyzer  
ZENTECH 1320 BIAS CURRENT

Testing Condition :

Temperature : 25 to 28 $^{\circ}C$   
Humidity : 60 to 70 % RH

Check by :



Test by :

