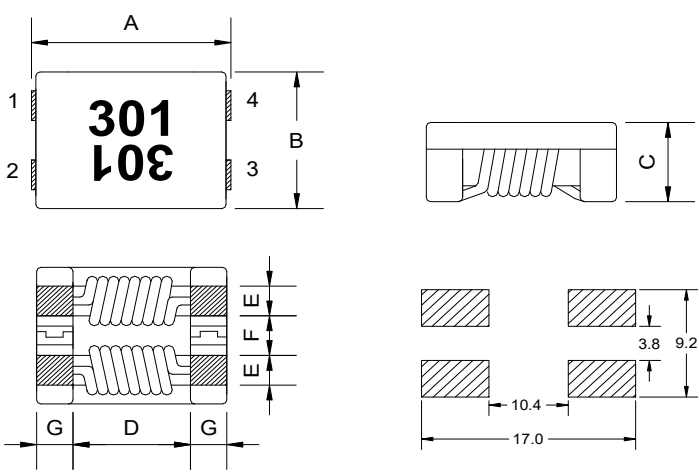


SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE FILTER CHOKE	SPEC NO.	SP-0230518002
ITEM	JSCM 1513V-301 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	15.0	±0.5
	B	13.0	±0.4
	C	6.0	MAX.
	D	9.3	TYP.
	E	2.7	±0.5
	F	3.6	±0.5
	G	2.8	±0.5

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
IMPEDANCE	200 (min.) Ω 300 (typ.)	☒ AGILENT 4294A Precision Impedance Analyzer
TEST FREQUENCY	100 MHz	☐ Agilent 4287A RF LCR Meter
RDC (1 line)	3.5 (max.) m Ω	☐ AGILENT 4285A Precision L.C.R.
Rated Current	14 (max.) A	☐ HP-4286A RF L.C.R. Meter.
Rated Volt.	125 (max) Vdc	☒ CHROMA 3302 Automatic Components Analyzer.
Insulation Resistance	10 (min) M Ω	☐ WAYNE KERR 6420 Precision Impedance Analyzer.
		☒ ZENTECH 1320 BIAS CURRENT.
		☒ BK PRECISION 2840 DC Resistance Meter
		☐ ZENTECH 502AC Resistance Merter
		☐ ADEX AX-1155B DC Low Ohm Meter
		☒ WAYNE KERR HI-POT TESTER 7600

REMARK :


- Operating temperature range : - 40°C to + 125°C (Including self temp. rise)
- Storage temperature range : -40~+125°C (on board)
- Marking : Laser Marking
- Compatible with AEC-Q200

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0230518002

Typical Performance Curves

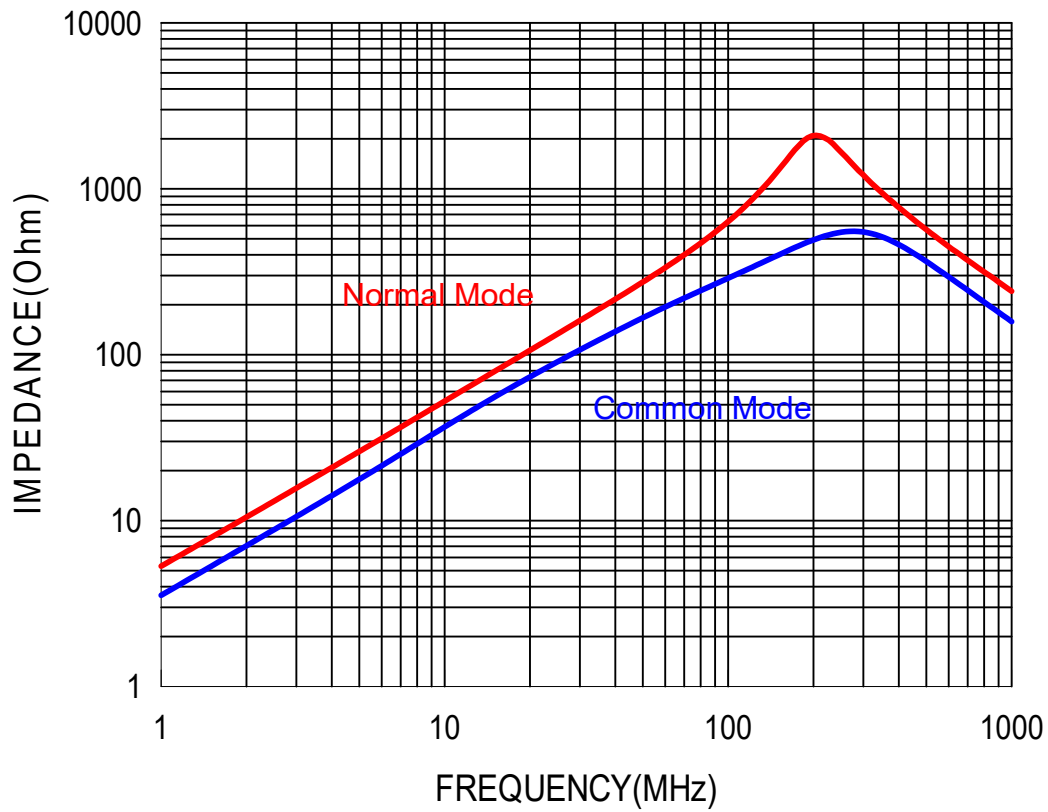

Check by :

姜秀琴

Test by :

陳秀月