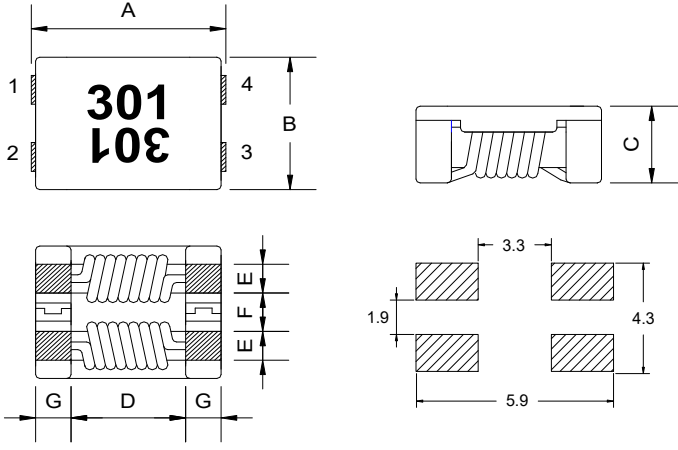


SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE FILTER CHOKE	SPEC NO.	SP-0230525004
ITEM	JSCM 0505V-301 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	5.5	±0.5
	B	5.5	±0.5
	C	3.5	MAX.
	D	3.3	TYP.
	E	1.2	±0.5
	F	1.9	±0.5
	G	1.1	±0.5

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
IMPEDANCE	150 (min.) 300 (typ.)	Ω	☒ AGILENT 4294A Precision Impedance Analyzer ☐ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter ☐ ADEX AX-1155B DC Low Ohm Meter ☒ WAYNE KERR HI-POT TESTER 7600
TEST FREQUENCY	100	MHz	
RDC (1 line)	7.5 (max.)	m Ω	
Rated Current	4.8 (max.)	A	
Rated Volt.	80 (max)	Vdc	
Insulation Resistance	10 (min)	M Ω	

REMARK :


- Operating temperature range : - 40℃ to + 125℃ (Including self temp. rise)
- Storage temperature range : -40~+125℃ (on board)
- Marking : Laser Marking
- Compatible with AEC-Q200

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0230525004

Typical Performance Curves

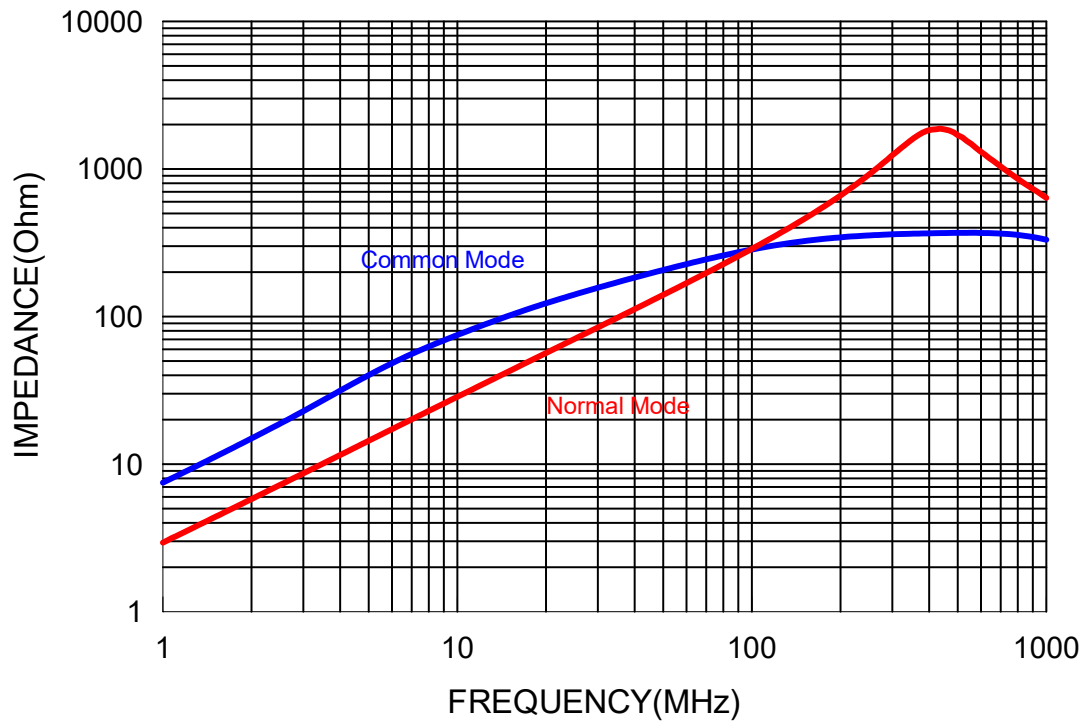

Check by :

姜秀琴

Test by :

陳秀月