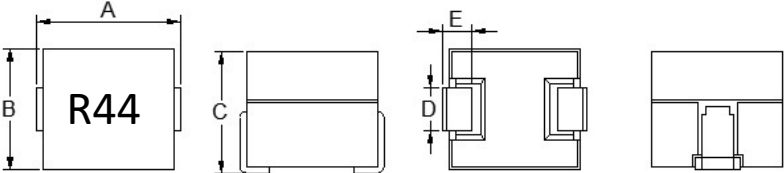


# SPECIFICATION FOR APPROVAL

|           |                                                                                             |          |                |
|-----------|---------------------------------------------------------------------------------------------|----------|----------------|
| COMMODITY | SMD Power Coils                                                                             | SPEC NO. | SP-0231020005  |
| ITEM      | JLPI 131308S-R44M-R2909 <span style="border: 1px solid black; padding: 0 2px;">Green</span> | 版本：A     | 表單編號：QR-012-02 |

| (1) DIMENSION: (UNIT: mm)                                                         |   | DIM.  | TOL.  |
|-----------------------------------------------------------------------------------|---|-------|-------|
|  | A | 13.46 | Max.  |
|                                                                                   | B | 12.95 | Max.  |
|                                                                                   | C | 8.00  | Max.  |
|                                                                                   | D | 5.08  | ±0.30 |
|                                                                                   | E | 2.54  | ±0.30 |
|                                                                                   |   |       |       |
|                                                                                   |   |       |       |
|                                                                                   |   |       |       |
|                                                                                   |   |       |       |
|                                                                                   |   |       |       |

| (2) ELECTRICAL CHARACTERISTIC |            |     | TEST INSTRUMENTS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUCTANCE                    | 0.44 ± 20% | μH  | <input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer<br><input type="checkbox"/> Agilent 4287A RF LCR Meter<br><input type="checkbox"/> AGILENT 4285A Precision L.C.R.<br><input type="checkbox"/> HP-4286A RF L.C.R. Meter.<br><input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer.<br><input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.<br><input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.<br><input checked="" type="checkbox"/> BK PRECISION 2840 DC Resistance Meter<br><input type="checkbox"/> ZENTECH 502AC Resistance Merter<br><input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter<br><input type="checkbox"/> WAYNE KERR HI-POT TESTER 7600 |
| TEST FREQUENCY                | 100        | KHz |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| TEST VOLT                     | 0.1        | V   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| RDC                           | 0.29 ± 9%  | mΩ  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Isat @25°C                    | 35 (max.)  | A   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Irms                          | 45 (max.)  | A   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                               |            |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## REMARK :

- Saturation Current (Isat) will cause L0 to drop approximately 30%.
- Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40°C.

| PURCHASER CONFIRMED : | APPROVED                                                                             | CHECKED                                                                               | DRAWN                                                                                 |
|-----------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                       |  |  |  |