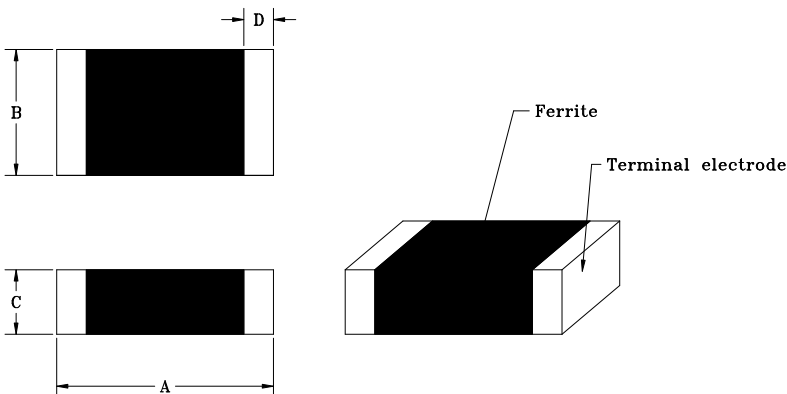


SPECIFICATION FOR APPROVAL

COMMODITY	High-Frequency Chip Beads	SPEC NO.	SP-0181119003
ITEM	JCB 160808GC-601/0.2 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	1.60	±0.20
	B	0.80	±0.20
	C	0.80	±0.20
	D	0.30	±0.20

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
IMPEDANCE at Z1	600 ± 25%	Ω	☐ AGILENT 4294A Precision Impedance Analyzer ☒ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter ☐ ADEX AX-1155B DC Low Ohm Meter ☐ WAYNE KERR HI-POT TESTER 7600
TEST FREQUENCY	100	MHz	
IMPEDANCE at Z2	1000 ± 40%	Ω	
TEST FREQUENCY	1	GHz	
RDC	0.8 (max)	Ω	
IDC	200 (max)	mA	

REMARK :


- . OPERATING TEMP. RANGE : -55℃ ~ +125℃
- . STORAGE TEMP. RANGE : -40℃ ~ +85℃

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0181119003

Typical Impedance v.s. Frequency Curve

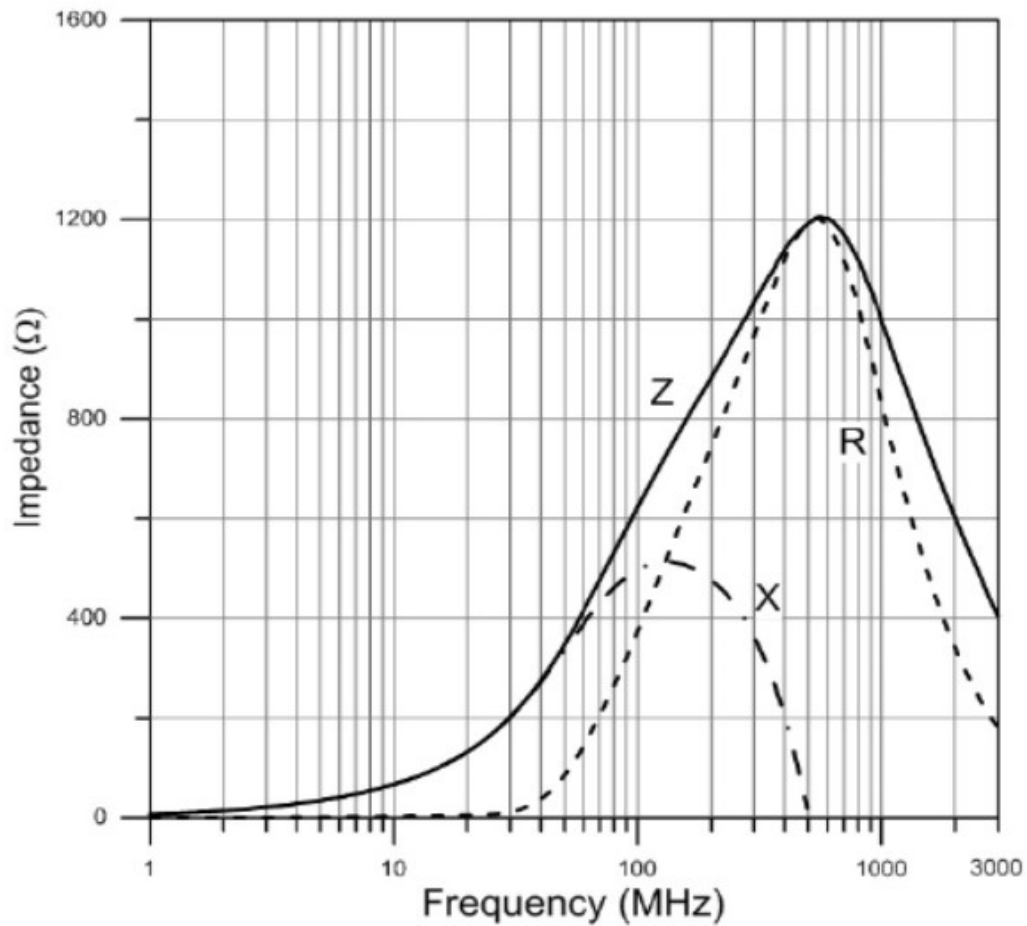

Check by :

姜秀琴

Test by :

陳秀月