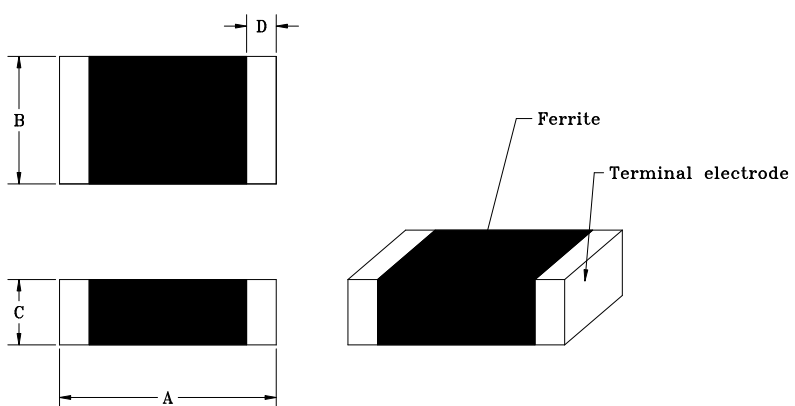


SPECIFICATION FOR APPROVAL

COMMODITY	High-Frequency Chip Beads	SPEC NO.	SP-0210520006
ITEM	JCB 160808GC-152/0.1 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	1.60	±0.20
	B	0.80	±0.20
	C	0.80	±0.20
	D	0.30	±0.20

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
IMPEDANCE at Z 1	1500 ± 25%	Ω	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY at Z 1	100	MHz	
IMPEDANCE at Z 2	1300 ± 40%	Ω	
TEST FREQUENCY at Z 2	1	GHz	
RDC	1.6 (max)	Ω	
IDC	100 (max)	mA	


REMARK :
. OPERATING TEMP. RANGE : -55℃ ~ +125℃
. STORAGE TEMP. RANGE : -40℃ ~ +85℃

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0210520006

Typical Impedance v.s. Frequency Curve

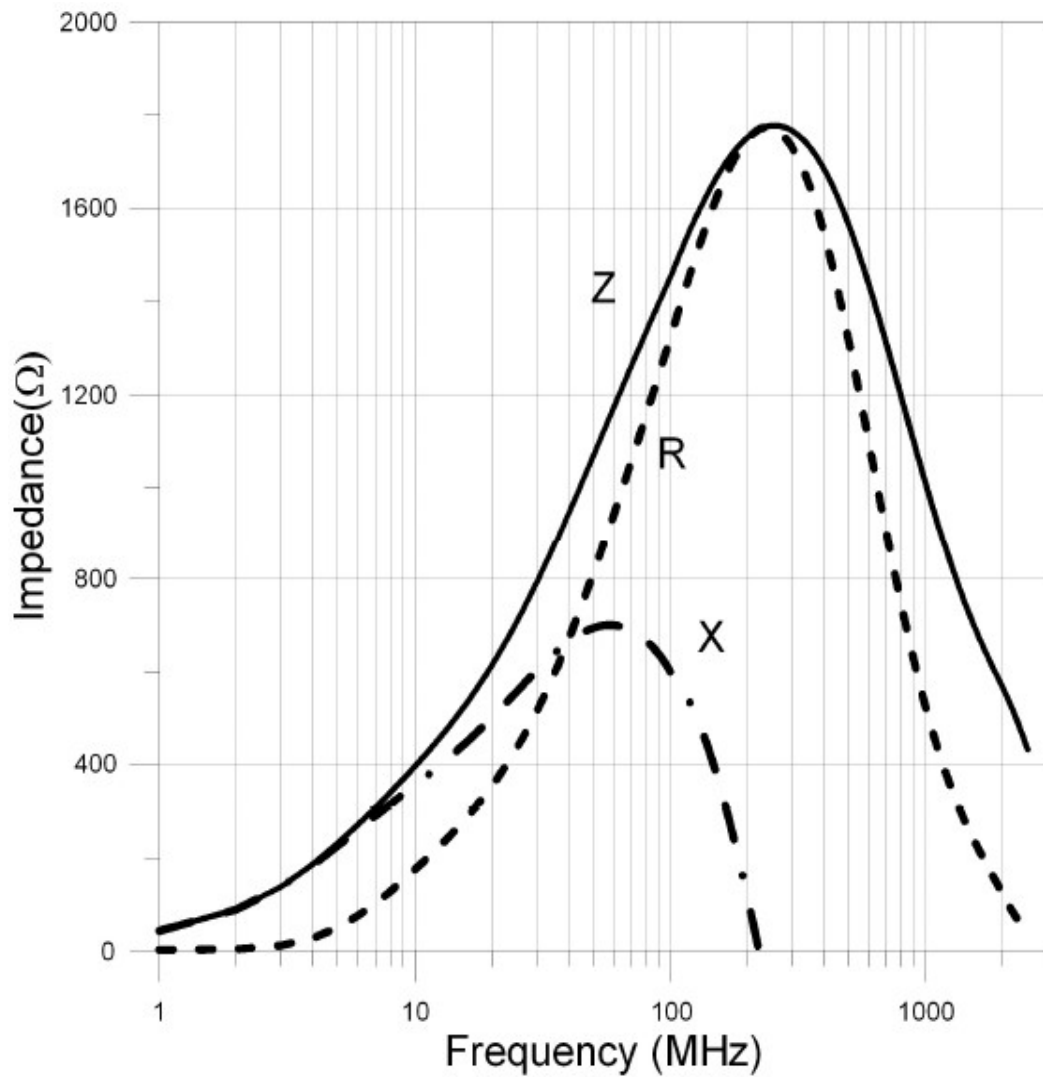

Check by :

姜秀琴

Test by :

陳秀月