



## Packaging Information

### (1) Reel Dimension

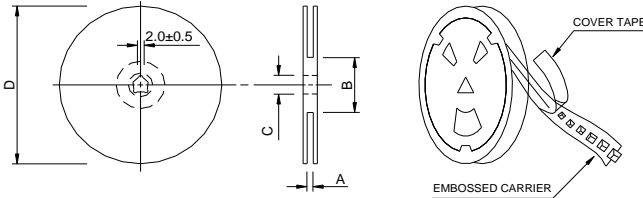

| Type     | A(mm)     | B(mm) | C(mm)       | D(mm) |
|----------|-----------|-------|-------------|-------|
| 13"x16mm | 16.4+2/-0 | 100±2 | 13+0.5/-0.2 | 330   |

### (2) Tape Dimension

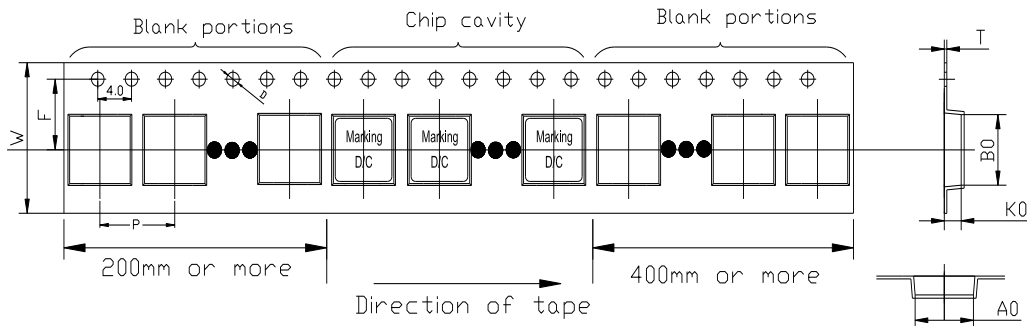


| Ao(mm)  | Bo(mm)  | Ko(mm)  | P(mm)    | W(mm)  | F(mm)   | T(mm)    | D(mm)   |
|---------|---------|---------|----------|--------|---------|----------|---------|
| 8.8±0.1 | 8.4±0.1 | 5.3±0.1 | 12.0±0.1 | 16±0.3 | 7.5±0.1 | 0.35±0.1 | 1.5±0.1 |

### (3) Packaging Quantity

| Size        | Reel |
|-------------|------|
| JRPI 0705FV | 800  |

### (4) Tearing Off Force

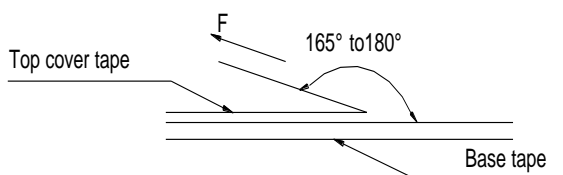

The force for tearing off cover tape is 10 to 130 grams in the arrow direction under the following conditions (referenced ANSI/EIA-481-D-2008 of 4.11 standard)

| Tearing Speed<br>mm | Room Temp.<br>(°C) | Room Humidity<br>(%) | Room atm<br>(hPa) |
|---------------------|--------------------|----------------------|-------------------|
| 300±10%             | 5~35               | 45~85                | 860~1060          |