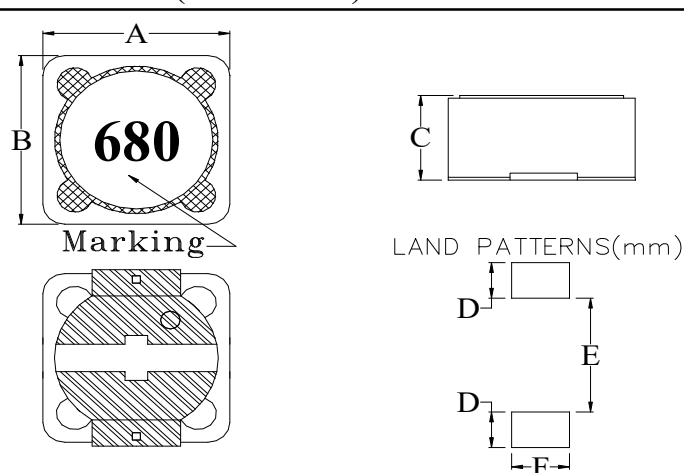


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-070314001
ITEM	JPRH 1204-680M Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.	
	A	12.5	Max.	
	B	12.5	Max.	
	C	5.0	Max.	
	D	2.8	REF.	
	E	7.0	REF.	
	F	5.4	REF.	

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	68 ± 20%	μH	<input type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer <input type="checkbox"/> Agilent 4287A RF LCR Meter <input type="checkbox"/> AGILENT 4285A Precision L.C.R. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> BK PRECISION 2840 DC Resistance Meter <input type="checkbox"/> ZENTECH 502AC Resistance Merter <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter <input type="checkbox"/> WAYNE KERR HI-POT TESTER 7600
TEST FREQUENCY	100	KHz	
TEST VOLT	0.1	V	
RDC	220 (max)	mΩ	
Isat	1.5 (max)	A	
Irms	1.5 (max)	A	

REMARK :

1. Inductance drop = 25% typ at Isat.
2. ΔT = 40°C rise typ at Irms.

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			