SPECIFICATION FOR APPROVAL

COMMODITY	High-Frequency Chip Beads	SPEC NO.	SP-0210520003
ITEM	JCB 160808GC-471 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)

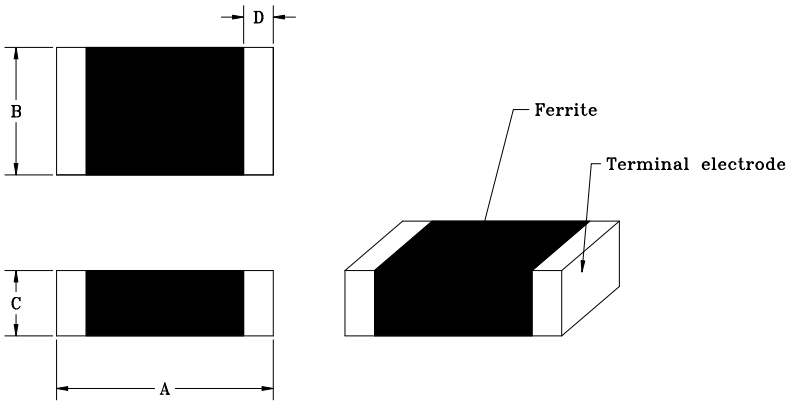

	DIM.	TOL.
A	1.60	±0.20
B	0.80	±0.20
C	0.80	±0.20
D	0.30	±0.20

(2) ELECTRICAL CHARACTERISTIC				TEST INSTRUMENTS.
IMPEDANCE at Z1	470 ± 25%		Ω	☑ AGILENT 4294A Precision Impedance Analyzer.
TEST FREQUENCY at Z1	100		MHz	☐ AGILENT 4285A Precision L.C.R.
IMPEDANCE at Z2	500 ± 40%		Ω	☐ HP-4286A RF L.C.R. Meter.
TEST FREQUENCY at Z2	1		GHz	☑ ZENTECH 3302 Automatic Components Analyzer.
RDC	0.7	(max)	Ω	☐ ZENTECH 101 L.C.R. Meter.
IDC	200	(max)	mA	☐ WAYNE KERR 6420 Precision Impedance Analyzer.
				☑ ZENTECH 1320 BIAS CURRENT.
				☑ ZENTECH 502AC Resistance Merter.
				☐ ADEX AX-1155B DC Low Ohm Meter.

REMARK：

. OPERATING TEMP. RANGE : -55℃ ~ +125℃

. STORAGE TEMP. RANGE : -40℃ ~ +85℃

PURCHASER CONFIRMED：	APPROVED	CHECKED	DRAWN
	楊偉鏗	姜秀琴	陳秀月

JANTEK

TEL：886-2-2689-4971 FAX：886-2-2689-4260
E-mail：jantek@jantek-elec.com.tw
Web-Site：www.jantek-elec.com.tw

TEST REPORT

SPEC NO： SP-0210520003

Typical Impedance v.s. Frequency Curve

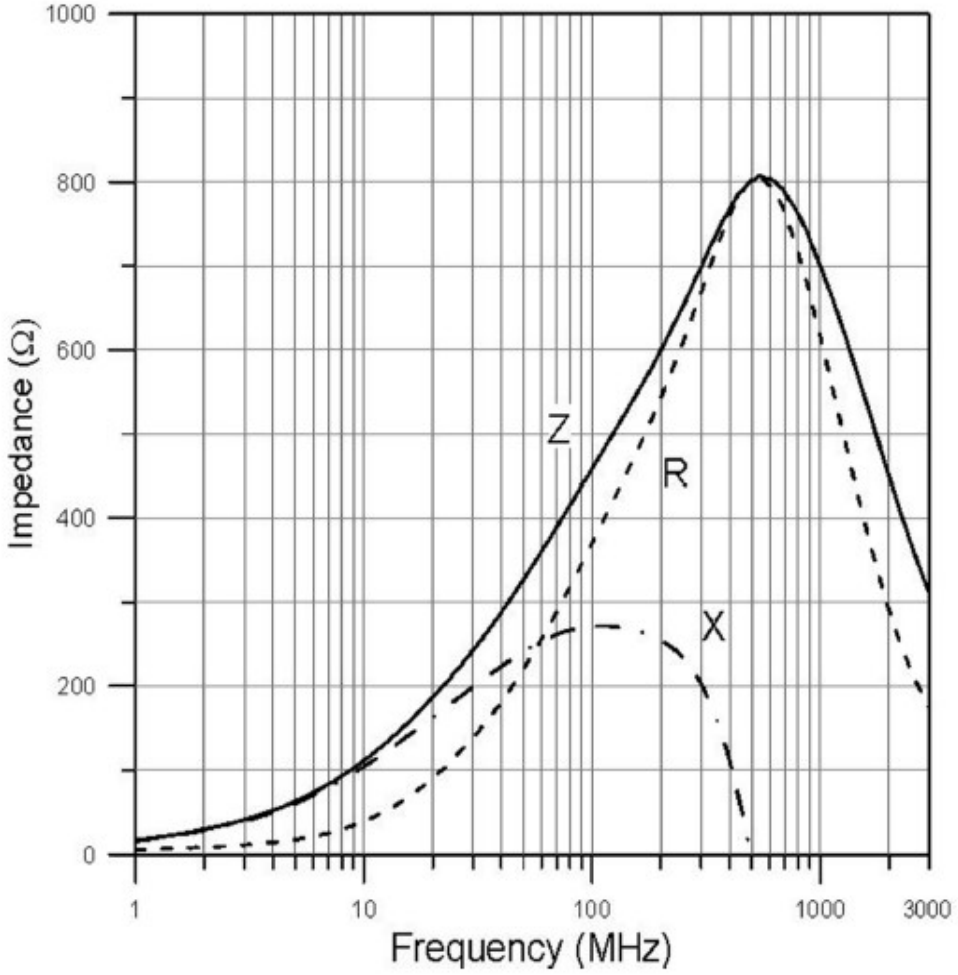

Check by：	Test by：

JANTEK

TEL：886-2-2689-4971 FAX：886-2-2689-4260
E-mail：jantek@jantek-elec.com.tw
Web-Site：www.jantek-elec.com.tw