


SPECIFICATIONS



- ◆ Dateline Noise Filter is a hinged-clamp high performance for EMI.
- ◆ Internal dimensions from 1.9mm to 35mm radius.
- ◆ Precision formed smooth surfaces prevent damage to wire insulation.

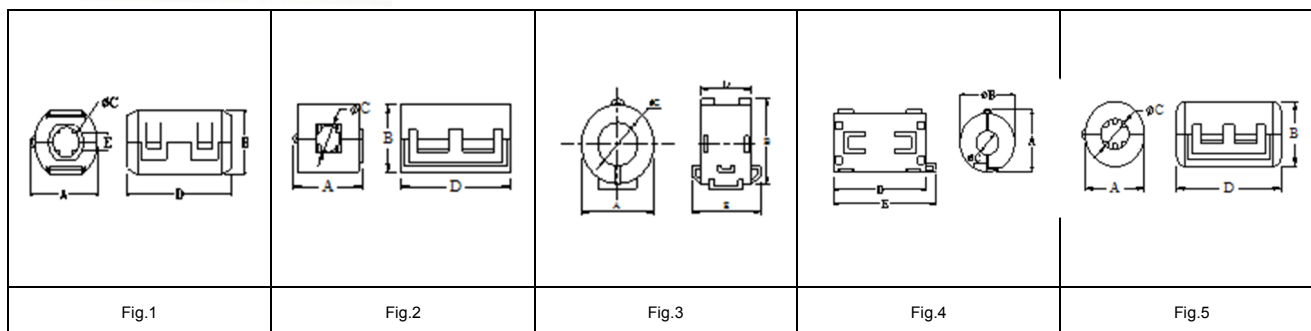

No	Part No.	Impedance (Ω)		Dimensions (mm)					Fig
		25MHz	100MHz	A	B	C	D	E	
1	JMLF 0526	50	100	13.0 $\pm$ 1	11.8 $\pm$ 1	5.0 $\pm$ 0.5	25.5 $\pm$ 1	2.5 $\pm$ 1	1
2	JMLF 0935	70	130	19.5 $\pm$ 1	18.0 $\pm$ 1	9.0 $\pm$ 0.5	35.0 $\pm$ 1	5.5 $\pm$ 1	1
3	JMLF 1336	50	110	23.5 $\pm$ 1	22.5 $\pm$ 1	13.0 $\pm$ 0.5	36.0 $\pm$ 1	8.5 $\pm$ 1	1
4	JMLF 0730	60	120	17.0 $\pm$ 1	15.0 $\pm$ 1	7.0 $\pm$ 0.5	30.0 $\pm$ 1	2.5 $\pm$ 1	1
5	JMLF 0523	65	120	15.0 $\pm$ 1	14.0 $\pm$ 1	5.2 $\pm$ 0.5	23.0 $\pm$ 1		2
6	JMLF 65	120	200	20.5 $\pm$ 1	20.0 $\pm$ 1	6.5 $\pm$ 0.5	33.0 $\pm$ 1		2
7	JMLF 100	80	130	25.5 $\pm$ 1	23.5 $\pm$ 1	10.0 $\pm$ 0.5	33.0 $\pm$ 1		2
8	JMLF 130	105	170	32.5 $\pm$ 1	30.0 $\pm$ 1	13.0 $\pm$ 0.5	33.0 $\pm$ 1		2
9	JMLF 0817	35	80	19.5 $\pm$ 1	23.0 $\pm$ 1	8.1 $\pm$ 0.5	17.0 $\pm$ 1	23.0 $\pm$ 1	3
10	JMLF 0820	50	110	19.5 $\pm$ 1	23.0 $\pm$ 1	8.1 $\pm$ 0.5	20.0 $\pm$ 1	26.0 $\pm$ 1	3
11	JMLF 1014	20	65	24.5 $\pm$ 1	28.5 $\pm$ 1	10.2 $\pm$ 0.5	13.5 $\pm$ 1	20.0 $\pm$ 1	3
12	JMLF 120	35	80	28.0 $\pm$ 1	32.0 $\pm$ 1	11.5 $\pm$ 0.5	18.0 $\pm$ 1	24.0 $\pm$ 1	3
13	JMLF 150	25	65	29.0 $\pm$ 1	33.0 $\pm$ 1	15.0 $\pm$ 0.5	15.5 $\pm$ 1	21.5 $\pm$ 1	3
14	JMLF 0718	30	70	15.5 $\pm$ 1	14.0 $\pm$ 1	7.0 $\pm$ 0.5	18.0 $\pm$ 1	22.0 $\pm$ 1	4
15	JMLF 80	70	130	20.5 $\pm$ 1	19.5 $\pm$ 1	9.0 $\pm$ 0.5	31.5 $\pm$ 1	35.5 $\pm$ 1	4
16	JMLF 1132	50	100	20.5 $\pm$ 1	21.0 $\pm$ 1	11.0 $\pm$ 0.5	32.0 $\pm$ 1	36.0 $\pm$ 1	4
17	JMLF 1334	80	130	31.5 $\pm$ 1	30.5 $\pm$ 1	13.0 $\pm$ 0.5	34.0 $\pm$ 1	39.5 $\pm$ 1	4
18	JMLF 35	40	95	15.0 $\pm$ 1	15.0 $\pm$ 1	4.0 $\pm$ 0.5	25.2 $\pm$ 1		5
19	JMLF 50	45	100	16.5 $\pm$ 1	16.5 $\pm$ 1	5.2 $\pm$ 0.5	29.5 $\pm$ 1		5
20	JMLF 75	70	150	21.0 $\pm$ 1	21.0 $\pm$ 1	7.5 $\pm$ 0.5	39.0 $\pm$ 1		5
21	JMLF 90	90	165	20.9 $\pm$ 1	20.9 $\pm$ 1	9.3 $\pm$ 0.5	41.8 $\pm$ 1		5

General color is black and white.

All the data listed in this catalogue are for reference only. JANTEK reserves the right to alter or revise the specifications without prior notification.

