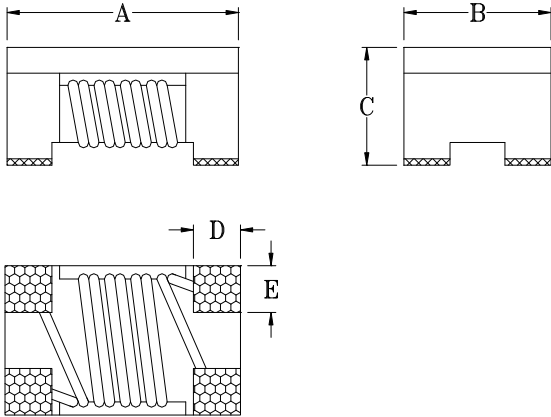


SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE CHOKE	SPEC NO.	SP-0200710001
ITEM	JPWC 0603-251 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	1.60	±0.10
	B	0.85	±0.10
	C	1.10	±0.10
	D	0.33	REF.
	E	0.25	REF.

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
IMPEDANCE	250 ± 25%	Ω	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	100	MHz	
RDC	0.28 (max)	Ω	
IDC	400 (max)	mA	
Rated Voltage	50	Vdc	
Withstanding Voltage	125	Vdc	
Insulation Resistance	10 (min)	MΩ	

REMARK :

. Operating temperature range -40°C to + 85°C

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			