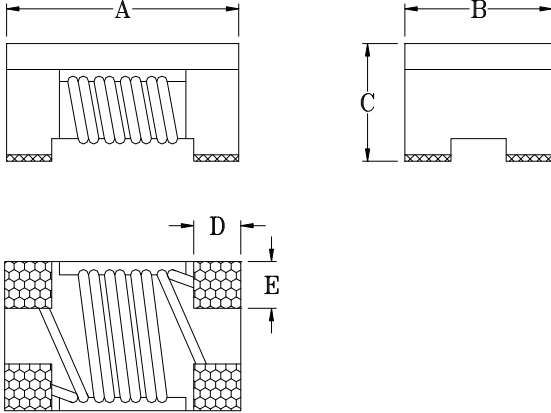


SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE CHOKE	SPEC NO.	SP-0210225001
ITEM	JPWC 1206-221 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	3.20	±0.2
	B	1.60	±0.2
	C	1.90	±0.2
	D	0.60	±0.1
	E	0.60	±0.1

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
IMPEDANCE	220 ± 25%	Ω	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	100	MHz	
RDC	0.50 (max)	Ω	
IDC	300 (max)	mA	
Rated Voltage	50 (max)	Vdc	
Withstanding Voltage	125 (max)	Vdc	
Insulation Resistance	10 (min)	MΩ	


REMARK :
 . Operating temperature -40~+125°C (Including self - temperature rise)

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0210225001

Typical Impedance v.s. Frequency Curve

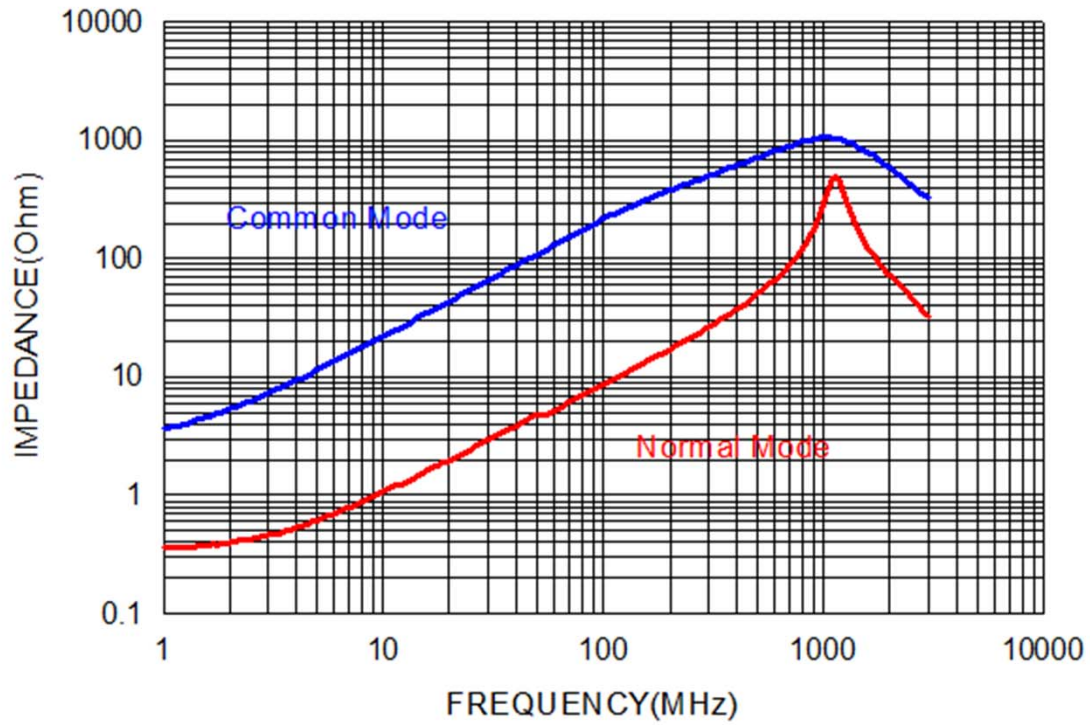

Check by :



Test by :

