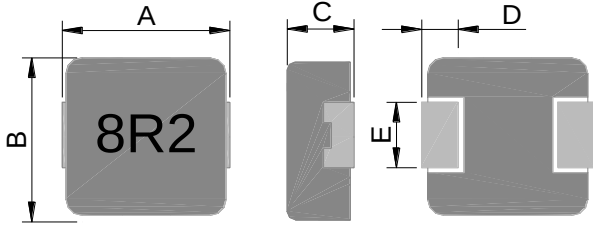


# SPECIFICATION FOR APPROVAL

|           |                                                                                     |          |                |
|-----------|-------------------------------------------------------------------------------------|----------|----------------|
| COMMODITY | SMD POWER COIL                                                                      | SPEC NO. | SP-0190319007  |
| ITEM      | JRPI 0418M-8R2M <span style="border: 1px solid black; padding: 0 2px;">Green</span> | 版本：A     | 表單編號：QR-012-02 |

| (1) DIMENSION: (UNIT: mm)                                                         |  | DIM. | TOL.          |
|-----------------------------------------------------------------------------------|--|------|---------------|
|  |  | A    | 4.45<br>±0.25 |
|                                                                                   |  | B    | 4.06<br>±0.25 |
|                                                                                   |  | C    | 1.60<br>±0.20 |
|                                                                                   |  | D    | 0.76<br>±0.30 |
|                                                                                   |  | E    | 2.00<br>±0.20 |
|                                                                                   |  |      |               |
|                                                                                   |  |      |               |
|                                                                                   |  |      |               |
|                                                                                   |  |      |               |
|                                                                                   |  |      |               |

| (2) ELECTRICAL CHARACTERISTIC |                                    | TEST INSTRUMENTS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUCTANCE                    | 8.2 ± 20% $\mu$ H                  | <input type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer.<br><input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter.<br><input type="checkbox"/> HP-4286A RF L.C.R. Meter.<br><input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer.<br><input type="checkbox"/> ZENTECH 101 L.C.R. Meter.<br><input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.<br><input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.<br><input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter.<br><input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter. |
| TEST FREQUENCY                | 100 KHz                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| TEST VOLT                     | 1 V                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| RDC                           | 198 (typ.)<br>235 (max) m $\Omega$ |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Isat                          | 2.4 (typ.) A                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Irms                          | 1.8 (typ.) A                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                               |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## REMARK :

1. All test data referenced to 25°C ambient
2. Saturation Current (Isat) will cause L0 to drop approximately 30%
3. Heat Rated Current (Irms) will cause the coil temperature rise approximately  $\Delta T$  of 40°C


| PURCHASER CONFIRMED | APPROVED                                                                             | CHECKED                                                                               | DRAWN                                                                                 |
|---------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                     |  |  |  |

# TEST REPORT

SPEC NO : SP-0190319007

## Typical Performance Curves

JRPI 0418M-8R2

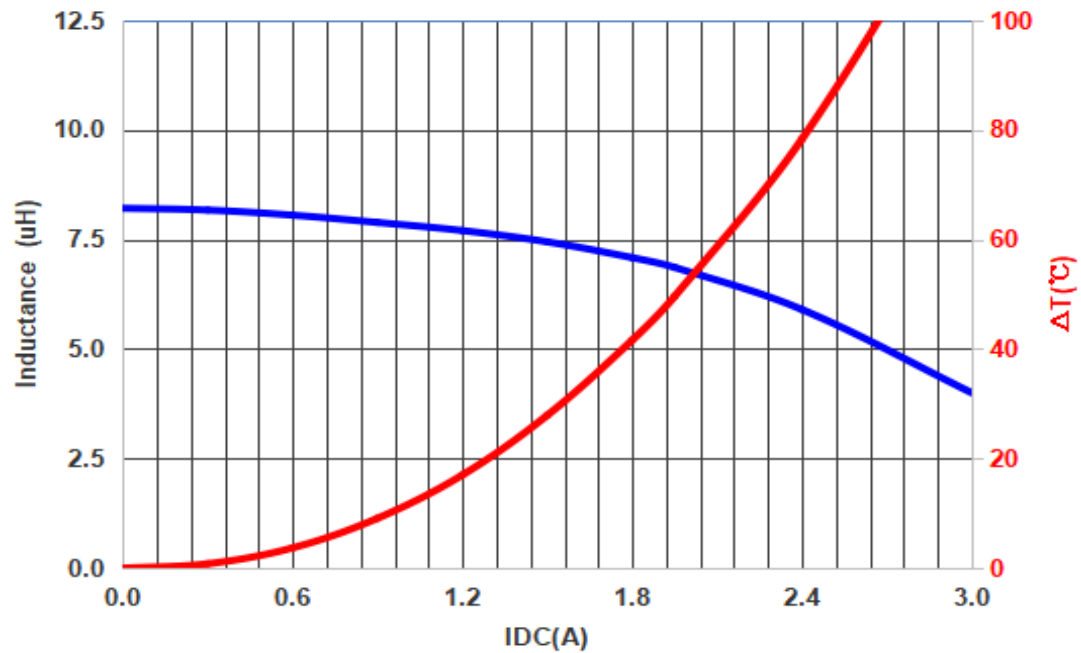

### Test Instrument :

ZENTECH 3302 Automatic Components Analyzer

ZENTECH 1320 BIAS CURRENT

### Testing Condition :

Temperature : 25 to 28°C

Humidity : 60 to 70 % RH

Check by :



Test by :



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260

E-mail : [jantek@jantek-elec.com.tw](mailto:jantek@jantek-elec.com.tw)

Web-Site : [www.jantek-elec.com.tw](http://www.jantek-elec.com.tw)