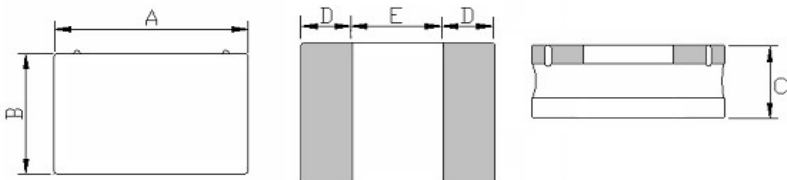


# SPECIFICATION FOR APPROVAL

|           |                                                                                      |          |                |
|-----------|--------------------------------------------------------------------------------------|----------|----------------|
| COMMODITY | SMD POWER COIL                                                                       | SPEC NO. | SP-0131204026  |
| ITEM      | JNR 252012U-6R8M <span style="border: 1px solid black; padding: 0 2px;">Green</span> | 版本：A     | 表單編號：QR-012-02 |

| (1) DIMENSION: (UNIT: mm)                                                         |   | DIM. | TOL.      |
|-----------------------------------------------------------------------------------|---|------|-----------|
|  | A | 2.50 | -0.1/+0.2 |
|                                                                                   | B | 2.00 | -0.1/+0.2 |
|                                                                                   | C | 1.20 | Max.      |
|                                                                                   | D | 0.85 | ± 0.20    |
|                                                                                   | E | 0.80 | ± 0.20    |
|                                                                                   |   |      |           |
|                                                                                   |   |      |           |
|                                                                                   |   |      |           |
|                                                                                   |   |      |           |
|                                                                                   |   |      |           |

| (2) ELECTRICAL CHARACTERISTIC |                           |     | TEST INSTRUMENTS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|---------------------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUCTANCE                    | 6.8 ± 20%                 | μH  | <input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer<br><input type="checkbox"/> Agilent 4287A RF LCR Meter<br><input type="checkbox"/> AGILENT 4285A Precision L.C.R.<br><input type="checkbox"/> HP-4286A RF L.C.R. Meter.<br><input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer.<br><input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.<br><input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.<br><input checked="" type="checkbox"/> BK PRECISION 2840 DC Resistance Meter<br><input type="checkbox"/> ZENTECH 502AC Resistance Merter<br><input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter<br><input type="checkbox"/> WAYNE KERR HI-POT TESTER 7600 |
| TEST FREQUENCY                | 1                         | MHz |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| TEST VOLT                     | 0.1                       | V   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| RDC                           | 0.250 ± 20%               | Ω   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Isat                          | 1.15 (typ.)<br>1.00 (max) | A   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Irms                          | 1.00 (typ.)<br>0.90 (max) | A   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                               |                           |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                               |                           |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## REMARK :


1. Isat : Saturation Current (Isat) will cause L0 to drop approximately 30%
2. Irms : Heat Rated Current (Irms) will cause the coil temperature rise approximately Δt40°C
3. Rated DC current: The lower value of Irms and Isat.

| PURCHASER CONFIRMED : | APPROVED                                                                             | CHECKED                                                                               | DRAWN                                                                                 |
|-----------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                       |  |  |  |

# TEST REPORT

SPEC NO : SP-0131204026

Typical Performance Curves

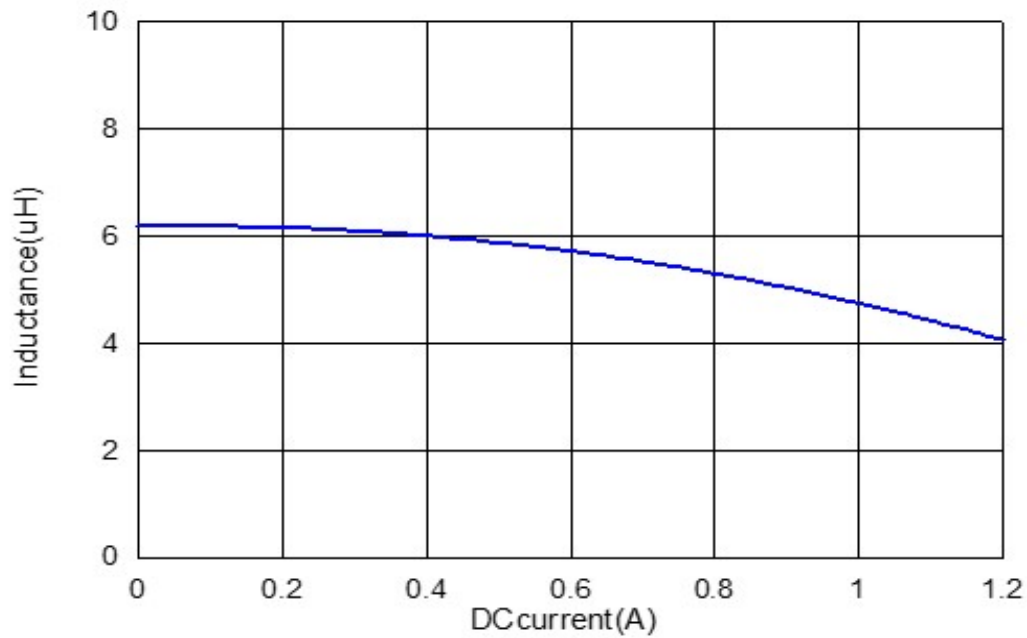

Test Instrument :

Chroma 3302 Automatic Components Analyzer.

ZENTECH 1320 BIAS CURRENT.

Testing Condition :

Temperature : 25 to 28°C

Humidity : 60 to 70 % RH

Check by :



Test by :

