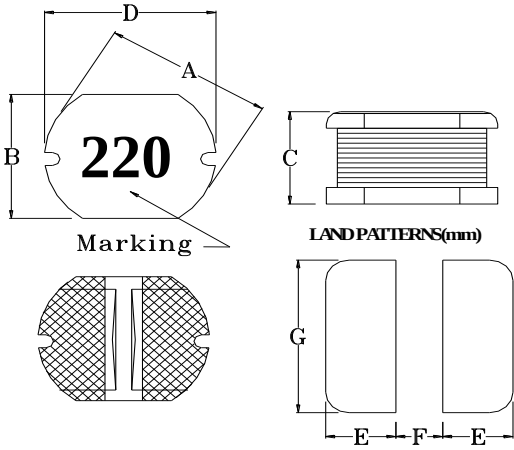


# SPECIFICATION FOR APPROVAL

|           |                                                                                   |          |                |
|-----------|-----------------------------------------------------------------------------------|----------|----------------|
| COMMODITY | SMD POWER COIL                                                                    | SPEC NO. | SP-060718083   |
| ITEM      | JTP 0703-220K <span style="border: 1px solid black; padding: 0 2px;">Green</span> | 版本：A     | 表單編號：QR-012-02 |

| (1) DIMENSION: (UNIT: mm)                                                         |  | DIM. | TOL.     |
|-----------------------------------------------------------------------------------|--|------|----------|
|  |  | A    | 7.8 ±0.3 |
|                                                                                   |  | B    | 7.0 ±0.3 |
|                                                                                   |  | C    | 3.5 ±0.5 |
|                                                                                   |  | D    | 7.8 ±0.3 |
|                                                                                   |  | E    | 3.0 REF. |
|                                                                                   |  | F    | 2.0 REF. |
|                                                                                   |  | G    | 7.5 REF. |
|                                                                                   |  |      |          |
|                                                                                   |  |      |          |
|                                                                                   |  |      |          |

| (2) ELECTRICAL CHARACTERISTIC |             |     | TEST INSTRUMENTS.                                                              |
|-------------------------------|-------------|-----|--------------------------------------------------------------------------------|
| INDUCTANCE                    | 22 ± 10%    | μ H | <input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer |
| TEST FREQUENCY                | 2.52        | MHz | <input checked="" type="checkbox"/> Agilent 4287A RF LCR Meter                 |
| TEST VOLT                     | 0.25        | V   | <input type="checkbox"/> AGILENT 4285A Precision L.C.R.                        |
| RDC                           | 0.129 (max) | Ω   | <input type="checkbox"/> HP-4286A RF L.C.R. Meter.                             |
| IDC                           | 1.07 (max)  | A   | <input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer. |
|                               |             |     | <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.         |
|                               |             |     | <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.                 |
|                               |             |     | <input checked="" type="checkbox"/> BK PRECISION 2840 DC Resistance Meter      |
|                               |             |     | <input type="checkbox"/> ZENTECH 502AC Resistance Merter                       |
|                               |             |     | <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter                        |
|                               |             |     | <input type="checkbox"/> WAYNE KERR HI-POT TESTER 7600                         |

## REMARK :

. This indicates the value of current when the inductance is 10% lower than its initial value at D.C. superimposition or D.C. current when at t=40°C, whichever is lower. (Ta=20°C)

## PURCHASER CONFIRMED :

| APPROVED                                                                             | CHECKED                                                                               | DRAWN                                                                                 |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |