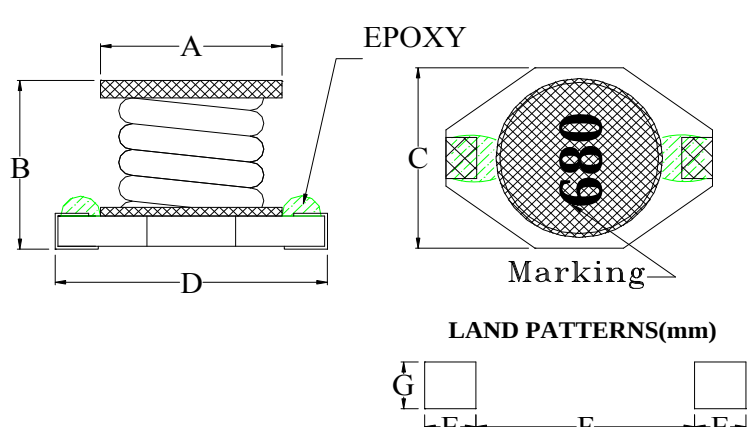


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060802077
ITEM	JSPK 0802-680M Green	版本：A	表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
		A	9.0
		B	3.0
		C	9.5
		D	13.5
		E	2.92
		F	7.37
		G	2.79
		H	

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	$68 \pm 20\%$ μH	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter.
TEST FREQUENCY	100 KHz	☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter.
TEST VOLT	0.1 V	☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT.
RDC	0.66 (max) Ω	☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
Isat	0.90 (max) A	
Irms	0.70 (max) A	

REMARK :

1. Inductance drop = 10% typ. at Isat.
2. $\Delta T = 40^{\circ}C$ typ. at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			