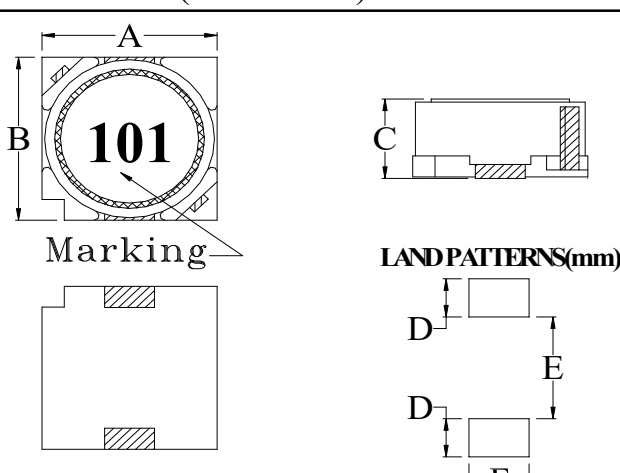


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060725031
ITEM	JSB 0603-101M Green	版本：A	表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
		A	6.0 ±0.2
		B	6.0 ±0.2
		C	3.2 Max
		D	1.5 REF.
		E	4.0 REF.
		F	2.2 REF.

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	100 ± 20%	μH	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Meter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	1	KHz	
TEST VOLT	0.25	V	
RDC	990 (max)	mΩ	
Isat	0.42 (max)	A	
Irms	0.64 (max)	A	

REMARK :

1. Inductance drop = 30% typ at Isat.
2. ΔT = 40°C rise typ at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			