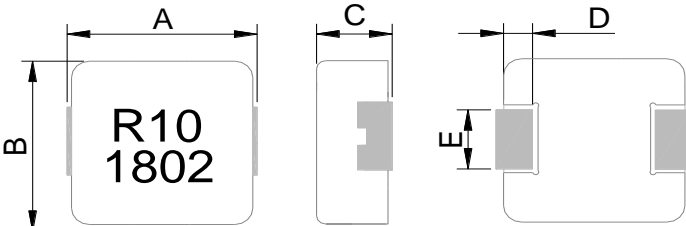


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-0230406032
ITEM	JRPI 0624P-R10N Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.	
	A	7.10	± 0.30	
	B	6.70	± 0.20	
	C	2.20	± 0.20	
	D	1.60	± 0.30	
	E	3.00	± 0.20	

(2) ELECTRICAL CHARACTERISTIC	TEST INSTRUMENTS.																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">INDUCTANCE</td> <td style="width: 20%;">0.10 ± 30%</td> <td style="width: 5%;">μ H</td> </tr> <tr> <td>TEST FREQUENCY</td> <td>100</td> <td>KHz</td> </tr> <tr> <td>TEST VOLT</td> <td>1</td> <td>V</td> </tr> <tr> <td>RDC</td> <td>1.20 (typ.) 1.35 (max)</td> <td>mΩ</td> </tr> <tr> <td>Isat</td> <td>70.0 (typ.) 60.0 (max)</td> <td>A</td> </tr> <tr> <td>Irms</td> <td>30.0 (typ.) 25.0 (max)</td> <td>A</td> </tr> </table>	INDUCTANCE	0.10 ± 30%	μ H	TEST FREQUENCY	100	KHz	TEST VOLT	1	V	RDC	1.20 (typ.) 1.35 (max)	mΩ	Isat	70.0 (typ.) 60.0 (max)	A	Irms	30.0 (typ.) 25.0 (max)	A	<input type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer <input type="checkbox"/> Agilent 4287A RF LCR Meter <input type="checkbox"/> AGILENT 4285A Precision L.C.R. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> BK PRECISION 2840 DC Resistance Meter <input type="checkbox"/> ZENTECH 502AC Resistance Merter <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter <input type="checkbox"/> WAYNE KERR HI-POT TESTER 7600
INDUCTANCE	0.10 ± 30%	μ H																	
TEST FREQUENCY	100	KHz																	
TEST VOLT	1	V																	
RDC	1.20 (typ.) 1.35 (max)	mΩ																	
Isat	70.0 (typ.) 60.0 (max)	A																	
Irms	30.0 (typ.) 25.0 (max)	A																	

REMARK :

1. All test data referenced to 25°C ambient.
2. Saturation Current (Isat) will cause L0 to drop approximately 30%
3. Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40°C


PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			



TEST REPORT

SPEC NO : SP-0230406032

Typical Performance Curves

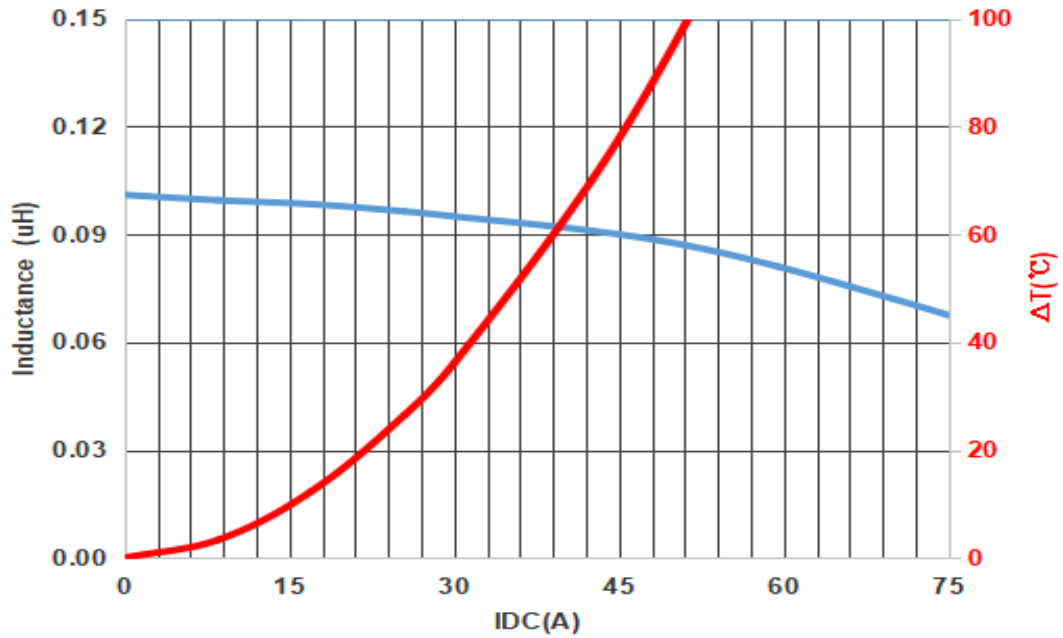

Test Instrument :

Chroma 3302 Automatic Components Analyzer
ZENTECH 1320 BIAS CURRENT

Testing Condition :

Temperature : 25 to 28°C
Humidity : 60 to 70 % RH

Check by :

姜秀琴

Test by :

陳秀月



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260
E-mail : jantek@jantek-elec.com.tw
Web-Site : www.jantek-elec.com.tw