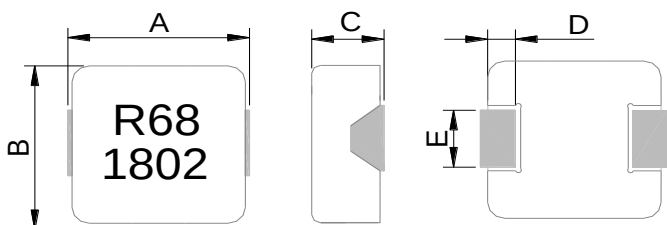


# SPECIFICATION FOR APPROVAL

|           |                                                                                     |          |                |
|-----------|-------------------------------------------------------------------------------------|----------|----------------|
| COMMODITY | SMD POWER COIL                                                                      | SPEC NO. | SP-0230411041  |
| ITEM      | JRPI 1265P-R68M <span style="border: 1px solid black; padding: 0 2px;">Green</span> | 版本：A     | 表單編號：QR-012-02 |

| (1) DIMENSION: (UNIT: mm)                                                         |   | DIM.  | TOL.  |
|-----------------------------------------------------------------------------------|---|-------|-------|
|  | A | 13.50 | ±0.50 |
|                                                                                   | B | 12.60 | ±0.20 |
|                                                                                   | C | 6.20  | ±0.30 |
|                                                                                   | D | 2.30  | ±0.30 |
|                                                                                   | E | 4.00  | ±0.30 |
|                                                                                   |   |       |       |
|                                                                                   |   |       |       |
|                                                                                   |   |       |       |
|                                                                                   |   |       |       |
|                                                                                   |   |       |       |

| (2) ELECTRICAL CHARACTERISTIC |                           |     | TEST INSTRUMENTS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------|---------------------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUCTANCE                    | 0.68 ± 20%                | μ H | <input type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer<br><input type="checkbox"/> Agilent 4287A RF LCR Meter<br><input type="checkbox"/> AGILENT 4285A Precision L.C.R.<br><input type="checkbox"/> HP-4286A RF L.C.R. Meter.<br><input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer.<br><input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.<br><input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.<br><input checked="" type="checkbox"/> BK PRECISION 2840 DC Resistance Meter<br><input type="checkbox"/> ZENTECH 502AC Resistance Merter<br><input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter<br><input type="checkbox"/> WAYNE KERR HI-POT TESTER 7600 |
| TEST FREQUENCY                | 100                       | KHz |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| TEST VOLT                     | 1                         | V   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| RDC                           | 1.25 (typ.)<br>1.50 (max) | mΩ  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Isat                          | 55.0 (typ.)<br>46.0 (max) | A   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Irms                          | 36.5 (typ.)<br>33.0 (max) | A   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                               |                           |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                               |                           |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                               |                           |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                               |                           |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |


|                                                                                            |
|--------------------------------------------------------------------------------------------|
| REMARK :                                                                                   |
| 1. All test data referenced to 25°C ambient.                                               |
| 2. Saturation Current (Isat) will cause L0 to drop approximately 30%                       |
| 3. Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40°C |

| PURCHASER CONFIRMED : | APPROVED                                                                             | CHECKED                                                                               | DRAWN                                                                                 |
|-----------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                       |  |  |  |

# TEST REPORT

SPEC NO : SP-0230411041

Typical Performance Curves

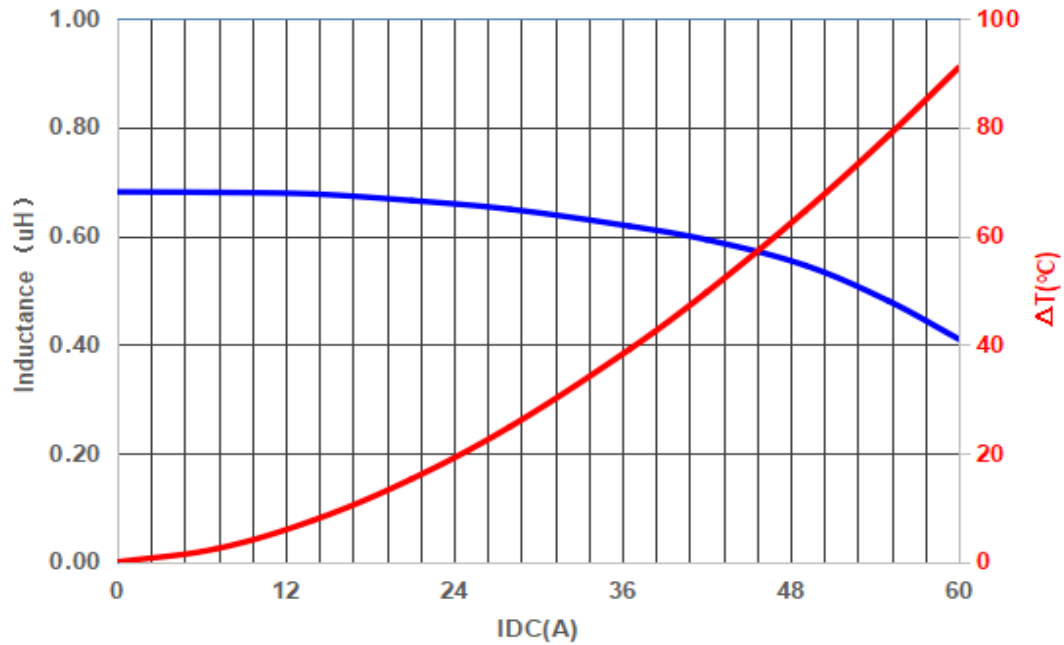

Test Instrument :

Chroma 3302 Automatic Components Analyzer  
ZENTECH 1320 BIAS CURRENT

Testing Condition :

Temperature : 25 to 28 $^{\circ}C$   
Humidity : 60 to 70 % RH

Check by :

姜秀琴

Test by :

陳秀月

**JANTEK**

TEL : 886-2-2689-4971 FAX : 886-2-2689-4260  
E-mail : [jantek@jantek-elec.com.tw](mailto:jantek@jantek-elec.com.tw)  
Web-Site : [www.jantek-elec.com.tw](http://www.jantek-elec.com.tw)