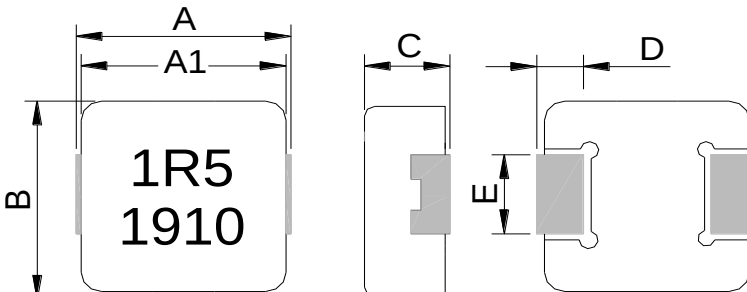


# SPECIFICATION FOR APPROVAL

|           |                                                                                      |          |                |
|-----------|--------------------------------------------------------------------------------------|----------|----------------|
| COMMODITY | SMD POWER COIL                                                                       | SPEC NO. | SP-0210323001  |
| ITEM      | JRPI 1265PV-1R5M <span style="border: 1px solid black; padding: 0 2px;">Green</span> | 版本：A     | 表單編號：QR-012-02 |

| (1) DIMENSION: (UNIT: mm)                                                         |  | DIM. | TOL.        |
|-----------------------------------------------------------------------------------|--|------|-------------|
|  |  | A    | 13.50 ±0.50 |
|                                                                                   |  | A1   | 12.60 ±0.30 |
|                                                                                   |  | B    | 12.60 ±0.20 |
|                                                                                   |  | C    | 6.20 ±0.30  |
|                                                                                   |  | D    | 2.30 ±0.30  |
|                                                                                   |  | E    | 4.00 ±0.30  |
|                                                                                   |  |      |             |
|                                                                                   |  |      |             |
|                                                                                   |  |      |             |
|                                                                                   |  |      |             |

| (2) ELECTRICAL CHARACTERISTIC |                                      | TEST INSTRUMENTS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUCTANCE                    | 1.5 ± 20% $\mu$ H                    | <input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer.<br><input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter.<br><input type="checkbox"/> HP-4286A RF L.C.R. Meter.<br><input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer.<br><input type="checkbox"/> ZENTECH 101 L.C.R. Meter.<br><input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.<br><input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.<br><input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter.<br><input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter. |
| TEST FREQUENCY                | 100 KHz                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| TEST VOLT                     | 1 V                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| RDC                           | 2.20 (typ.)<br>2.53 (max) m $\Omega$ |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Isat                          | 35 (typ.)<br>30 (max) A              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Irms                          | 29 (typ.)<br>25 (max) A              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                               |                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## REMARK :


1. All test data referenced to 25°C ambient
2. Saturation Current (Isat) will cause L0 to drop approximately 30%
3. Heat Rated Current (Irms) will cause the coil temperature rise approximately  $\Delta T$  of 40°C
4. Compatible with AEC-Q200

| PURCHASER CONFIRMED | APPROVED                                                                             | CHECKED                                                                               | DRAWN                                                                                 |
|---------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                     |  |  |  |

# TEST REPORT

SPEC NO : SP-0210323001

Typical Performance Curves

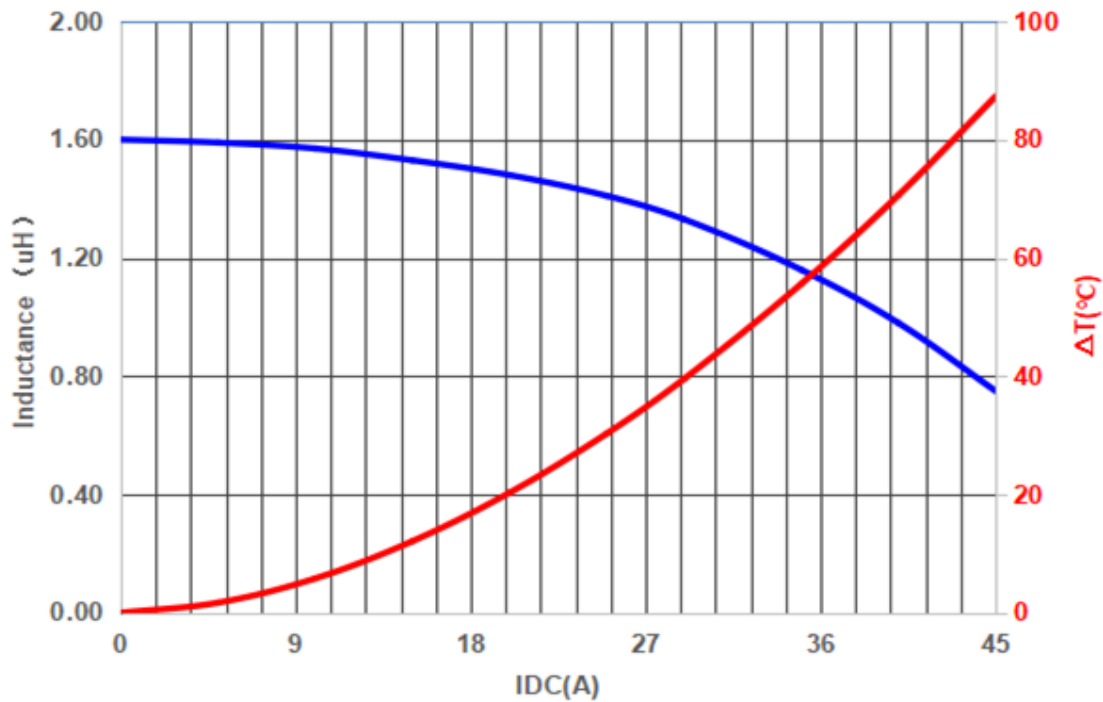

Test Instrument :

Chroma 3302 Automatic Components Analyzer  
ZENTECH 1320 BIAS CURRENT

Testing Condition :

Temperature : 25 to 28°C  
Humidity : 60 to 70 % RH

Check by :



Test by :



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260  
E-mail : jantek@jantek-elec.com.tw  
Web-Site : www.jantek-elec.com.tw