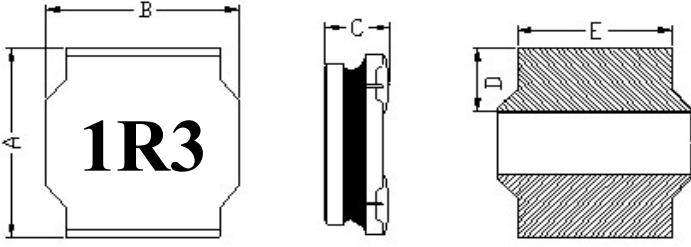


# SPECIFICATION FOR APPROVAL

|           |                                                                                     |          |                |
|-----------|-------------------------------------------------------------------------------------|----------|----------------|
| COMMODITY | SMD POWER COIL                                                                      | SPEC NO. | SP-0181030025  |
| ITEM      | JNR 6045NV-1R3M <span style="border: 1px solid black; padding: 0 2px;">Green</span> | 版本：A     | 表單編號：QR-012-02 |

| (1) DIMENSION: (UNIT: mm)                                                         |   | DIM. | TOL.   |
|-----------------------------------------------------------------------------------|---|------|--------|
|  | A | 6.00 | ± 0.30 |
|                                                                                   | B | 6.00 | ± 0.30 |
|                                                                                   | C | 4.20 | ± 0.30 |
|                                                                                   | D | 1.90 | ± 0.30 |
|                                                                                   | E | 4.80 | ± 0.30 |
|                                                                                   |   |      |        |
|                                                                                   |   |      |        |
|                                                                                   |   |      |        |
|                                                                                   |   |      |        |
|                                                                                   |   |      |        |

| (2) ELECTRICAL CHARACTERISTIC |                           |     | TEST INSTRUMENTS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------|---------------------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUCTANCE                    | 1.3 ± 20%                 | μ H | <input type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer<br><input type="checkbox"/> Agilent 4287A RF LCR Meter<br><input type="checkbox"/> AGILENT 4285A Precision L.C.R.<br><input type="checkbox"/> HP-4286A RF L.C.R. Meter.<br><input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer.<br><input checked="" type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.<br><input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.<br><input checked="" type="checkbox"/> BK PRECISION 2840 DC Resistance Meter<br><input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter<br><input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter<br><input type="checkbox"/> WAYNE KERR HI-POT TESTER 7600 |
| TEST FREQUENCY                | 1                         | MHz |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| TEST VOLT                     | 1                         | V   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| RDC                           | 10.5 ± 20%                | mΩ  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Isat                          | 12.5 (typ.)<br>11.5 (max) | A   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Irms                          | 7.5 (typ.)<br>7.0 (max)   | A   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                               |                           |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## REMARK :


- Saturation Current (Isat) will cause L0 to drop approximately 30%.
- Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40℃
- Rated DC current: The lower value of Irms and Isat
- Compatible with AEC-Q200

| PURCHASER CONFIRMED : | APPROVED                                                                             | CHECKED                                                                               | DRAWN                                                                                 |
|-----------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                       |  |  |  |

# TEST REPORT

SPEC NO : SP-0181030025

Typical Performance Curves

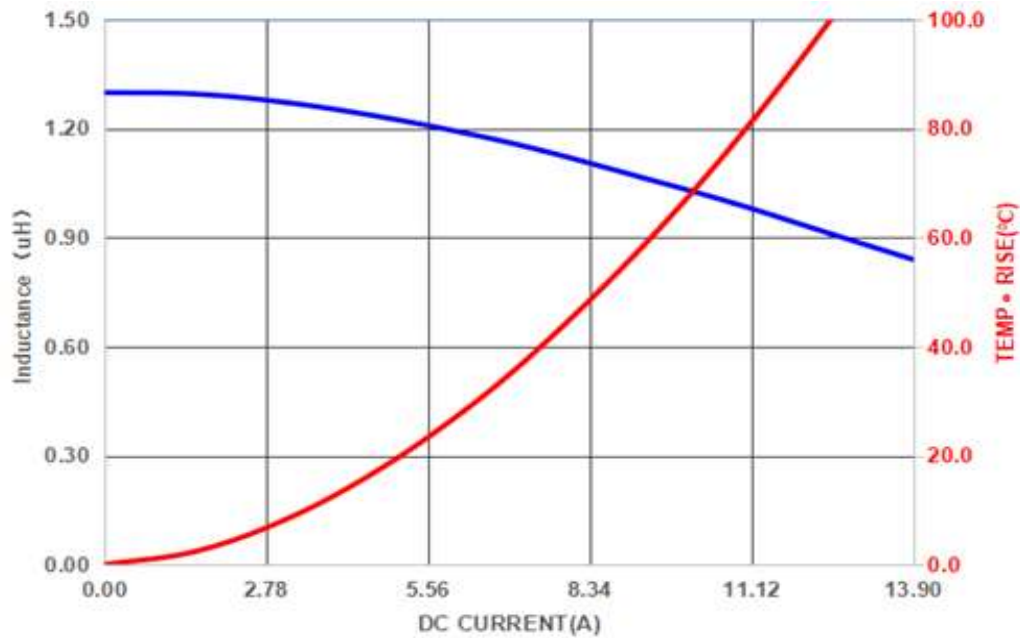

## Test Instrument :

Chroma 3302 Automatic Components Analyzer  
Zentech 1320 BIAS Current

## Testing Condition :

Temperature : 25 to 28°C  
Humidity : 60 to 70 % RH

Check by :



Test by :

